


UNIT PAVERS PAVEMENT PLAN

Footpath

TYPICAL ISOLATION


JOINT DETAIL

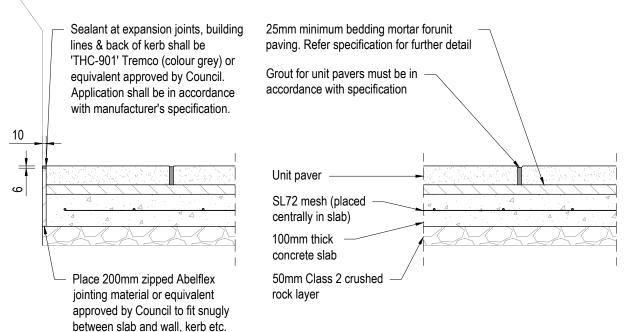

TYPICAL GROUT JOINTS AND MORTAR BEDDING

Injected non-shrink cement-mortar grout 400 Deformed tie bar N12 x 800 long at 800 existing concrete slab centres max, placed centrally in slab

TYPICAL EXISTING CONNECTION JOINT DETAIL

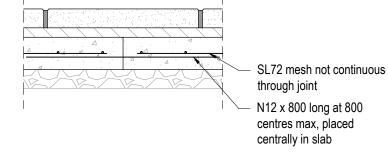

NOTES

Drill holes in centre of

- 1. Concrete strength: 25 MPa at 28 days.
- Pattern to match existing pavement, or as specified by Council.
- All dimensions are in millimetres unless noted otherwise.

TYPICAL CONSTRUCTION JOINT DETAIL

	Disclaimer: The authors and sponsoring organisations shall have no liability or responsibility to the user or any other person or entity with respect to any liability, loss or damage caused or alleged to be caused, directly or indirectly, by the adoption and use of these Standard Drawings including, but not limited to, any interruption of service, loss of business or anticipatory profits, or consequential damages resulting from the use of these Standard Drawings. Persons must not rely on these Standard Drawings as the equivalent of, or a substitute for, project-specific design and assessment by an appropriately qualified professional.	PORT PHILLIP	DRAWING NOT TO SCALE Approved Project Services	- Drawing FOOTPATH PAVEMENT UNIT PAVER	
A APPROVED FOR USE DEC 202 No Revision Date			Dec. 2020	Original Size A3 Drawing No: CPP1306	Rev: A