
NOTES:



Α	APPROVED FOR USE	DEC 2020
No	Revision	Date

The authors and sponsoring organisations shall have no liability or responsibility to the user or any other person or entity with respect to any liability, loss or damage caused or alleged to be caused, directly or indirectly, by the adoption and use of these Standard Drawings including, but not limited to, any interruption of service, loss of business or anticipatory profits, or consequential damages resulting from the use of these Standard Drawings. Persons must not rely on these Standard Drawings as the equivalent of, or a substitute for, project-specific design and assessment by an appropriately qualified professional.

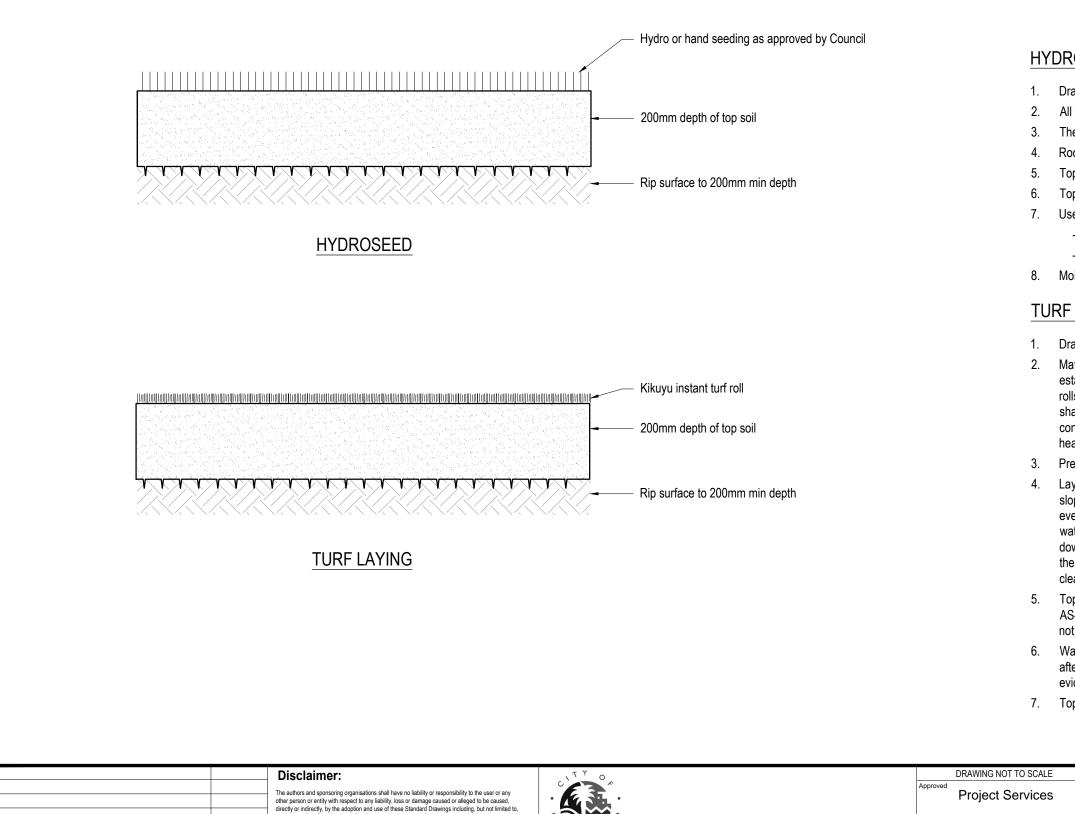

Dec. 2020

1. Where excavation will occur, contractor must conduct a Dial Before You Dig (www.1100.com.au).

HYDROSEED NOTES:

- Drawing in millimetres unless noted otherwise.
- All weeds shall be removed from the lawn area.
- The subgrade shall be ripped to a depth of 200mm min.
- Rocks/clods greater than 50mm shall be broken down or removed.
- Topsoil shall not be cultivated into underlying soil layers.
- Top soil to conform with AS4416:2018
- Use lawn mix comprised of:
- 60% Perennial rye
- 40% Kikuyu
- 8. Moisten topsoil to full depth prior to hydroseed applications.

TURF LAYING NOTES:

- 1. Drawing in millimetres unless noted otherwise.
- 2. Materials: Kikuyu instant turf. The turf shall be sourced from an established and experienced instant turf supplier in pre-cut slabs or rolls and be delivered to site in a healthy and stress-free condition. It shall be free of weeds, pests and disease and present a dense and consistent dark green sword. It shall have a good root profile with healthy stolons and not be suffering from moisture depletion.
- 3. Preparation: remove any existing turf, weeds or debris.
 - Laying: lay pieces of turf in straight lines running perpendicular to the slope, with cross-joints staggered, and close butting. Lay turf with an even gradient, free from lumps and depressions and not able to pond water. Ensure that new turf finishes flush with existing turf. Tamp down well and fill all joints with top dressing. Any cutting or shaping of the turf shall be done with a sharp spade edge or similar to ensure a clean cut.
- 5. Top dressing: top dressing is to be pit sand to comply with AS4419:2018. Spread sand evenly between grass joints in layers of not more than 10mm, do not bury grass.
 - Watering: Turf shall be sufficiently watered no later than two hours after installation, evenly saturated to the point of moisture being evident on the soil surface under turf.
- 7. Top soil to conform with AS4416:2018

Drawing Title	HYDRO	SEED AND TUR	ELAYING	
Original Size A3	Drawing No:	CPP3105	Rev:	A