




TOP VIEW

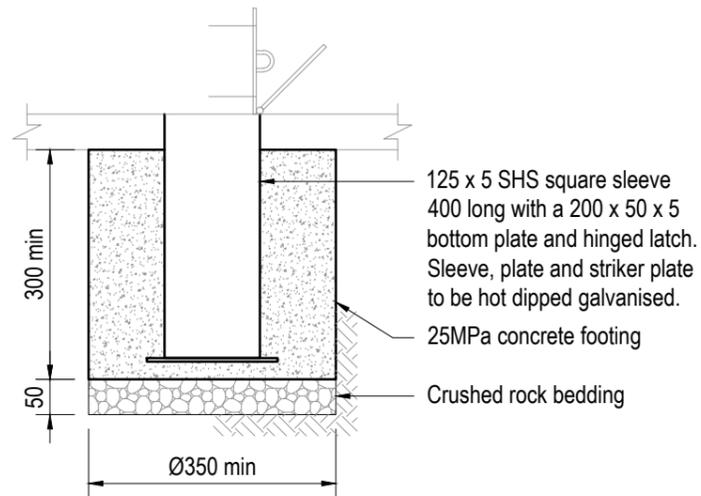


REMOVABLE (HINGED)

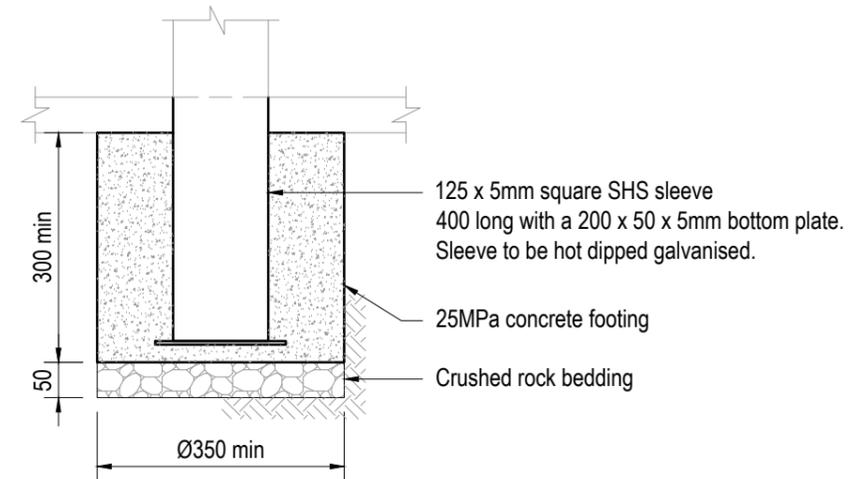


REMOVABLE SLEEVE

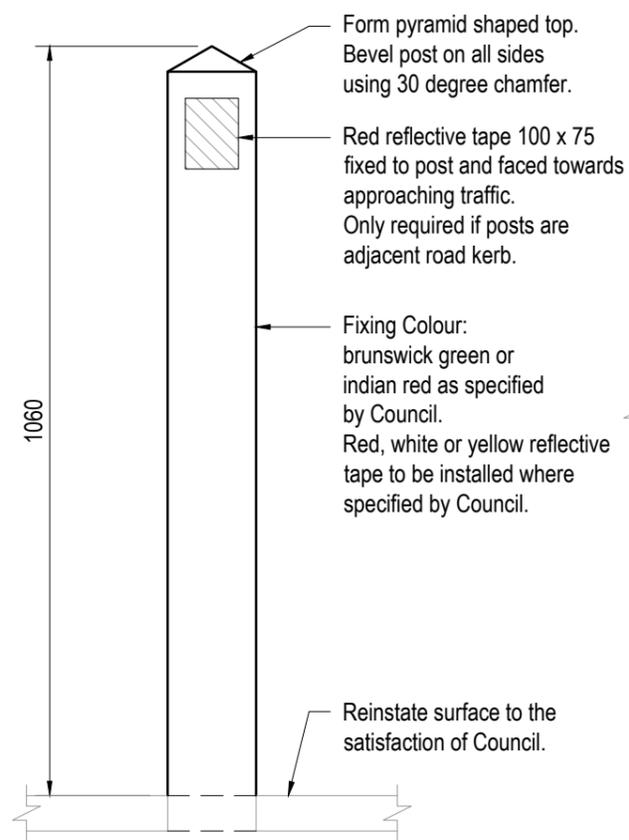

POST

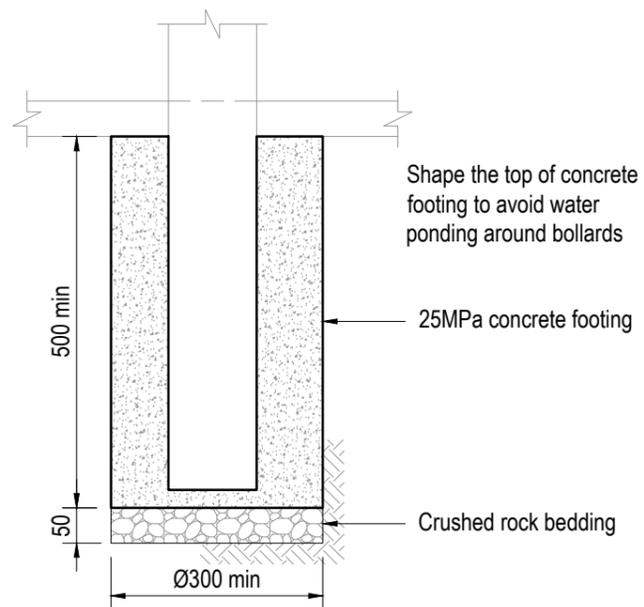

FIXED

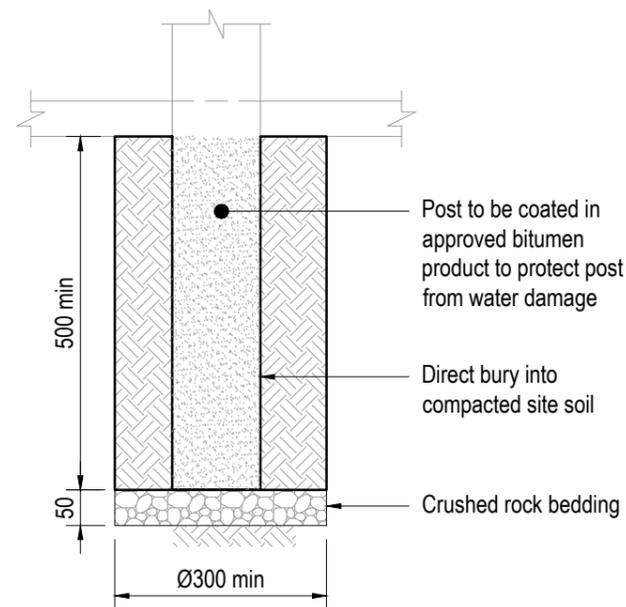

DIRECT BURY

NOTES

1. Drawing in millimetres unless noted otherwise.
2. Timber to be hazard class H3 minimum.
3. Bollards should be used sparingly. Please consider alternatives before installing bollards.
4. Refer to design drawings for bollard location, spacing, size and height.
5. Bollards to be in accordance with AS 3845.
6. Bollards to be installed in accordance with suppliers specifications.
7. Requirement to attach reflector to be confirmed with Council's representative prior to construction.
8. Concrete footings to be 25MPa unless noted otherwise.
9. A Dial Before You Dig (DBYD) must be conducted where excavation is required.

Disclaimer:

The authors and sponsoring organisations shall have no liability or responsibility to the user or any other person or entity with respect to any liability, loss or damage caused or alleged to be caused, directly or indirectly, by the adoption and use of these Standard Drawings including, but not limited to, any interruption of service, loss of business or anticipatory profits, or consequential damages resulting from the use of these Standard Drawings. Persons must not rely on these Standard Drawings as the equivalent of, or a substitute for, project-specific design and assessment by an appropriately qualified professional.



A	APPROVED FOR USE	DEC 2020
No	Revision	Date

DRAWING NOT TO SCALE		Drawing Title	TIMBER BOLLARD
Approved	Project Services	Original Size	A3
Date	Dec. 2020	Drawing No:	CPP3511
			Rev: A