



CITY OF PORT PHILLIP
PORT PHILLIP PLANNING SCHEME

This endorsed plan complies with Condition No. 12 in Planning Permit No: PDPL/00817/2022
Date: 12/12/2024 Sheet: 1 of 8

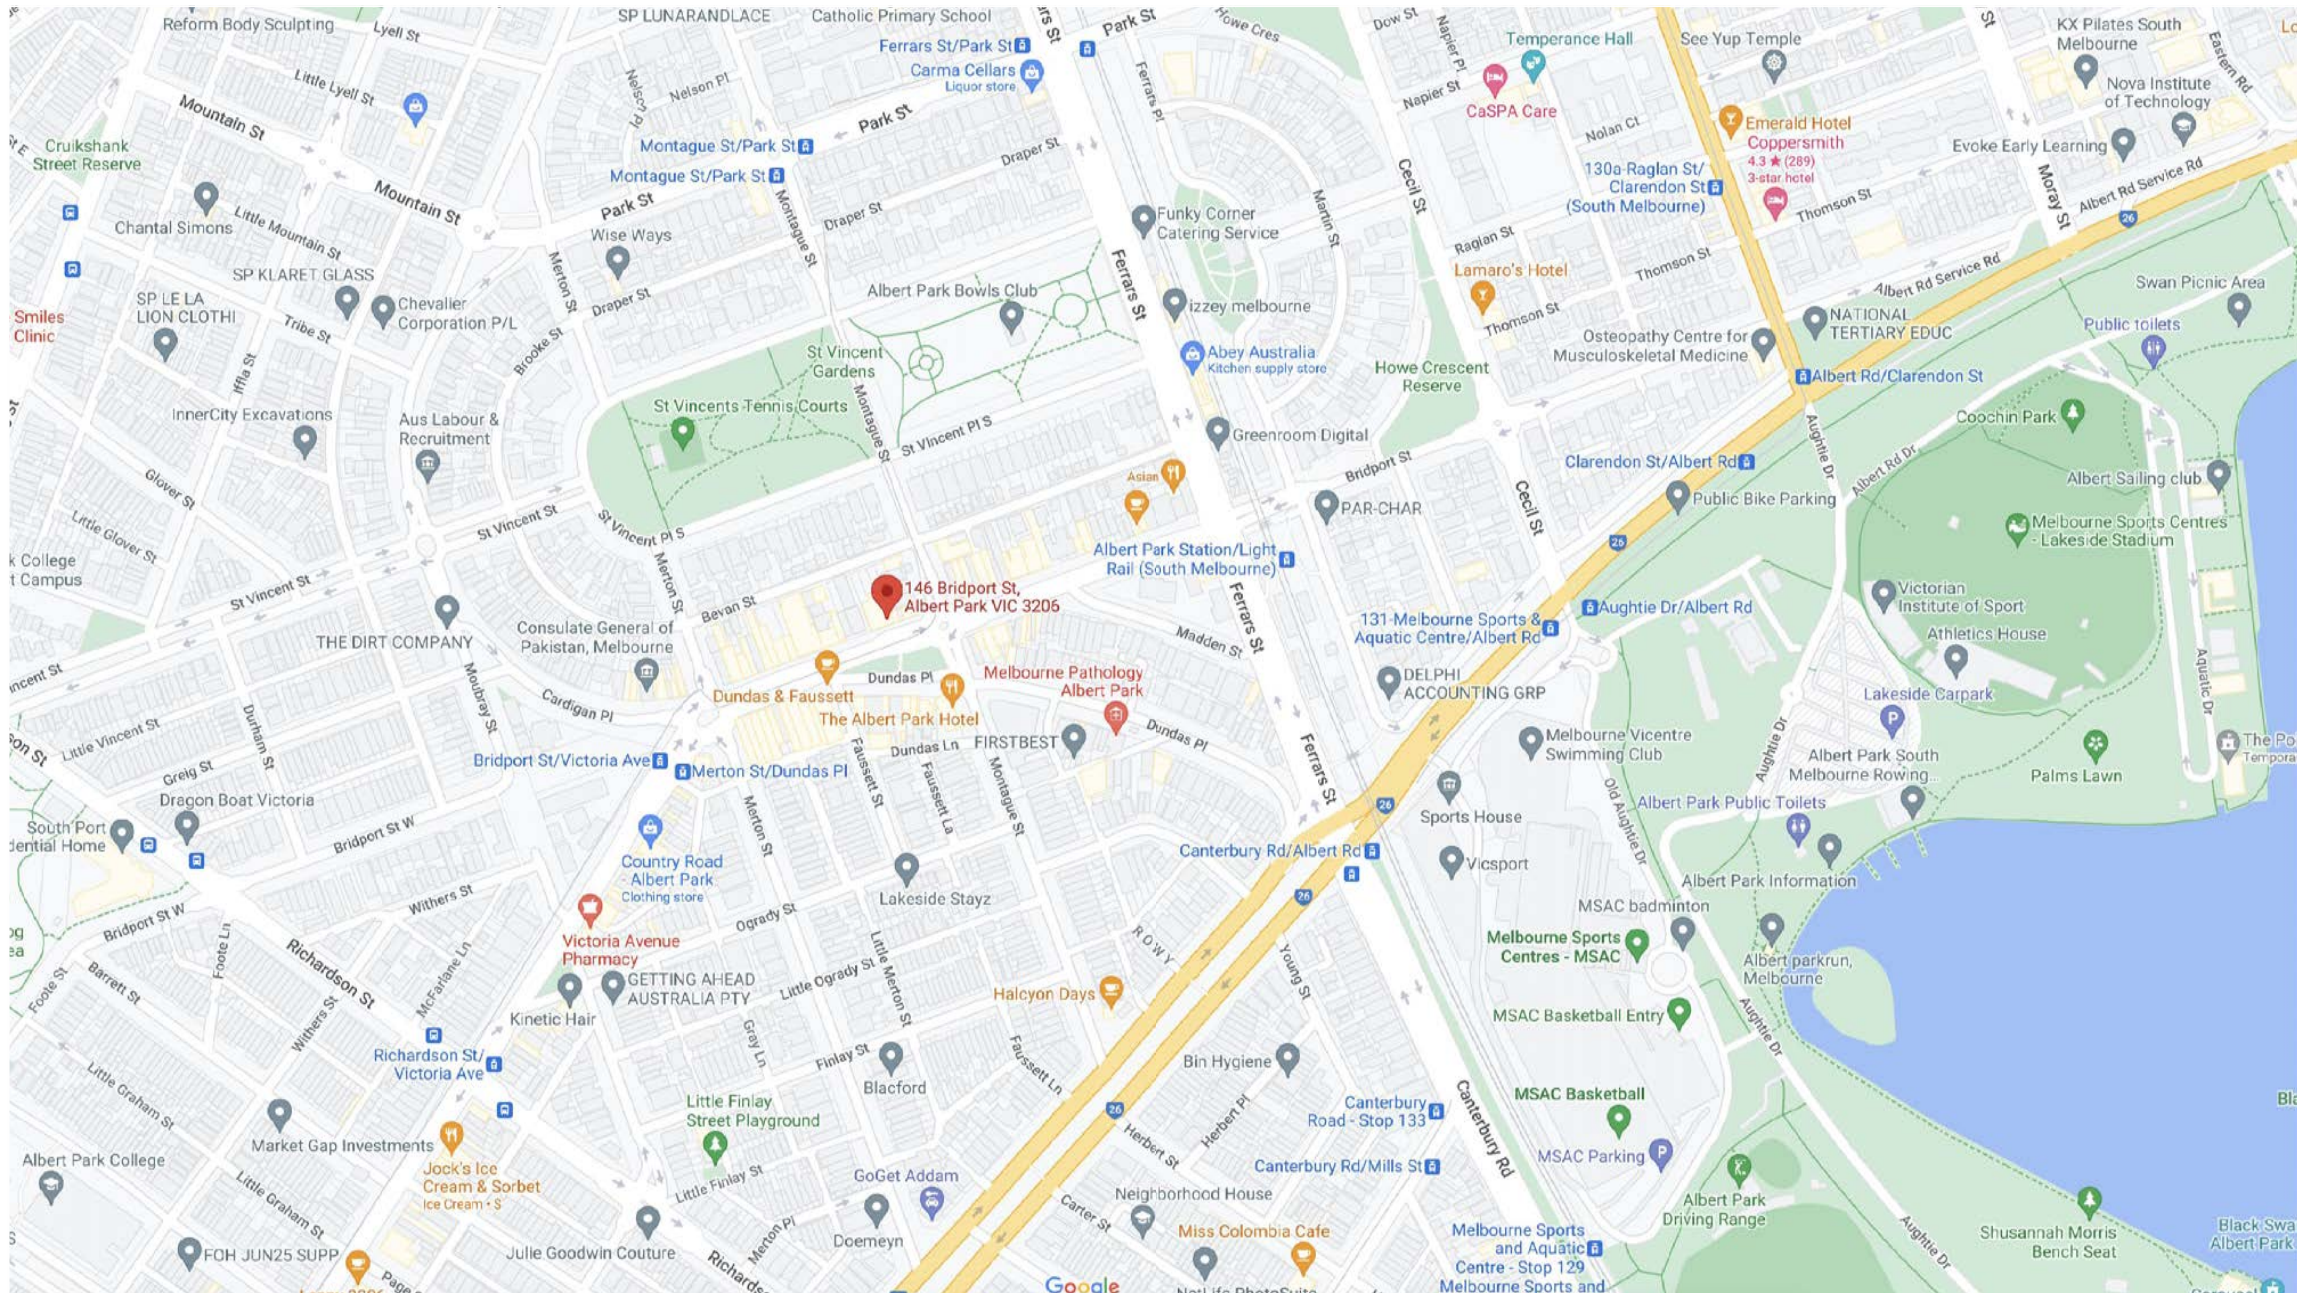

SITE LOCATION
NTS | GOOGLE MAPS

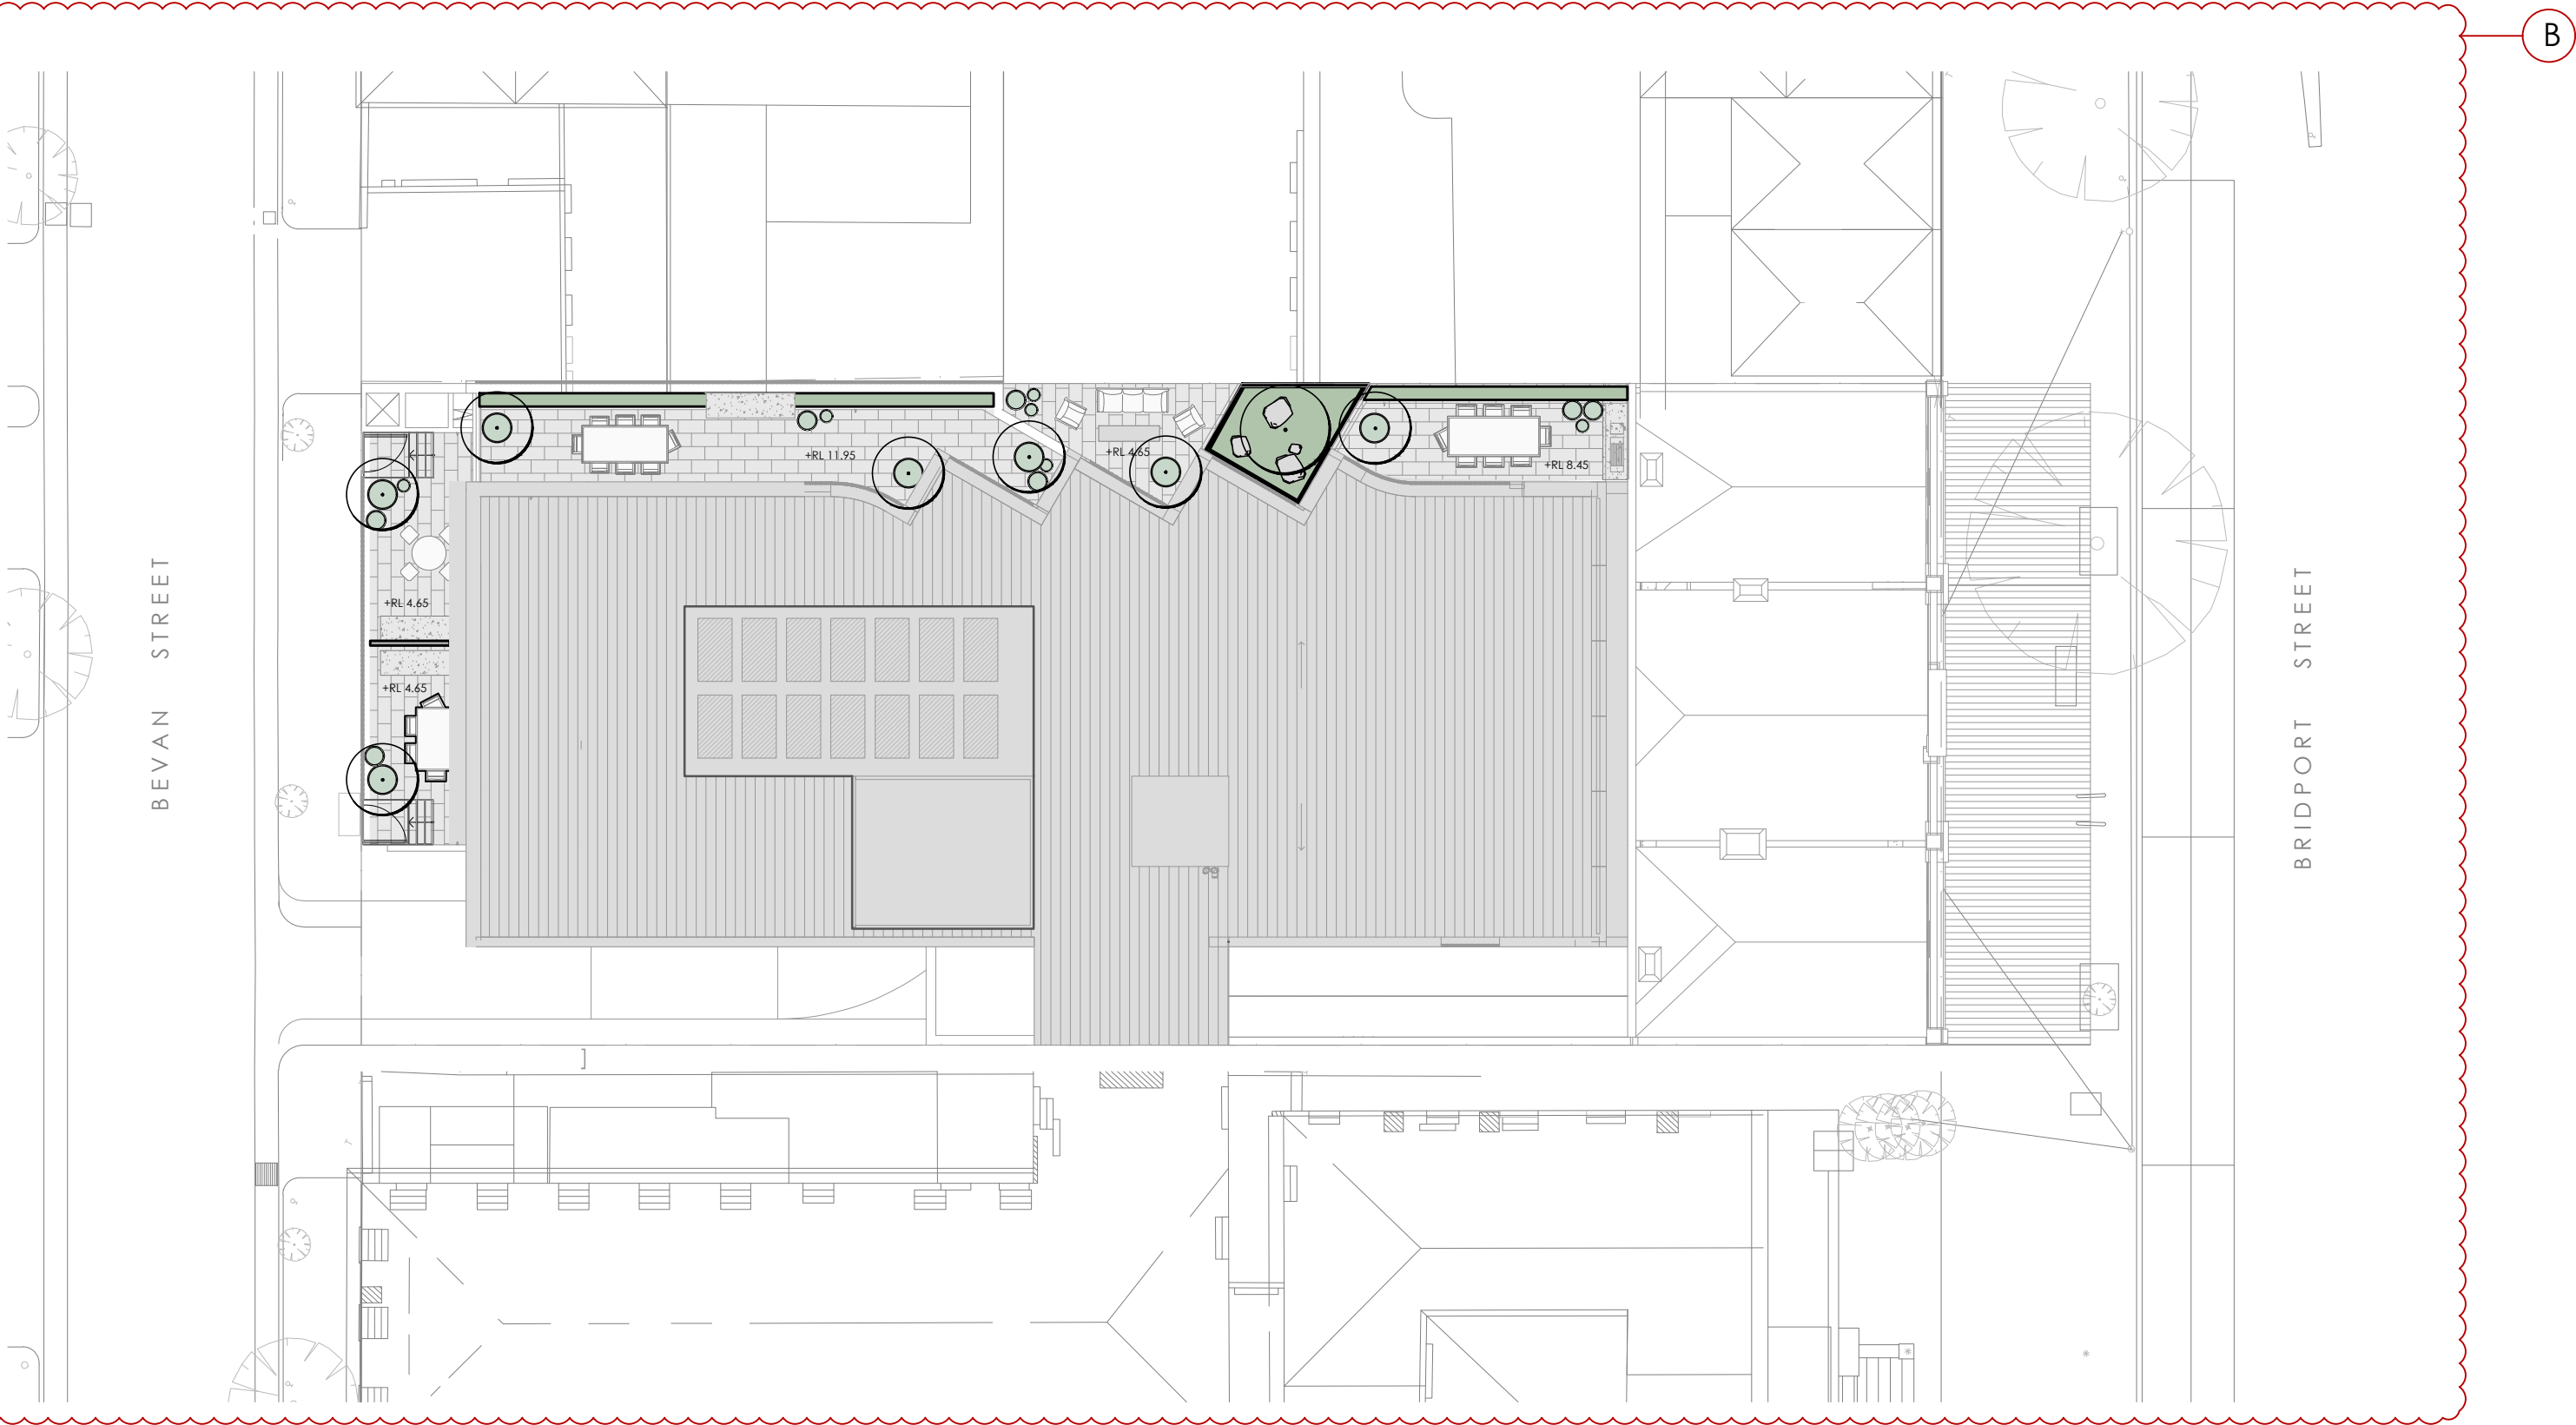

SITE PLAN
SCALE 1:250 @ A1

DRAWING SCHEDULE

691_TP_01 COVER PAGE
691_TP_02 PLANT SCHEDULE

691_TP_10 LANDSCAPE PLAN - GROUND
691_TP_11 LANDSCAPE PLAN - LEVEL 01
691_TP_12 LANDSCAPE PLAN - LEVEL 02
691_TP_13 LANDSCAPE PLAN - LEVEL 03

691_TP_45 TYPICAL DETAILS


691_TP_50 GENERAL SPECIFICATION

GENERAL NOTES

- ALL LANDSCAPE DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE ARCHITECT'S AND ADDITIONAL CONSULTANT'S DRAWINGS, SPECIFICATIONS AND REPORTS
- ALL PUBLIC UTILITY SERVICES ARE TO BE LOCATED ON SITE BY THE CONTRACTOR PRIOR TO THE COMMENCEMENT OF WORKS. THE LOCATION, PRESENCE AND EXTENT OF SERVICES SHOWN ARE NOT GUARANTEED COMPLETE OR CORRECT
- PERFORM EXCAVATION IN THE VICINITY OF UNDERGROUND UTILITIES WITH CARE AND IF NECESSARY, BY HAND. THE CONTRACTOR BEARS FULL RESPONSIBILITY FOR THIS WORK AND DISRUPTION OR DAMAGE TO UTILITIES SHALL BE REPAIRED IMMEDIATELY AT NO EXPENSE TO THE OWNER
- NO TREES PROTECTED UNDER THE LOCAL COUNCIL'S TREE PRESERVATION ORDER ARE TO BE REMOVED UNLESS APPROVED BY DEVELOPMENT CONSENT OR PERMIT OBTAINED FROM COUNCIL
- ALL PAVING IS INDICATIVE, TO BE TO FUTURE SPECIFICATION, AND SET OUT ON SITE
- ALL WORK TO BE CARRIED OUT IN ACCORDANCE WITH THE LOCAL COUNCIL'S APPROVAL, STANDARDS AND CODES
- THE CONTRACTOR IS TO ENSURE THAT ALL THE WORKS ARE CARRIED OUT IN ACCORDANCE WITH THE WORK HEALTH AND SAFETY ACT
- MBD TO REVIEW PLANT MATERIALS AT SOURCE OR BY PHOTOGRAPHS PRIOR TO PURCHASE AND DELIVERY
- EXACT LOCATIONS OF NEW PLANT MATERIAL TO BE SETOUT AND APPROVED BY THE MBD ONSITE PRIOR TO INSTALLATION. MBD RESERVES THE RIGHT TO ADJUST PLANTS TO EXACT LOCATION ONSITE

DRAINAGE AND IRRIGATION NOTES

- REFER TO CIVIL ENGINEER'S UTILITY AND DRAINAGE PLANS FOR UTILITY LOCATION AND DRAINAGE INFORMATION.
- REQUIREMENTS FOR LANDSCAPE DRAINAGE TO BE CONFIRMED ONSITE UNLESS OTHERWISE SHOWN ON THE LANDSCAPE PLANS
- TREE PITS THAT HAVE BEEN EXCAVATED INTO HEAVY EARTH OR STONE TO CONTAIN A RING OF AG PIPE LAID AT THE INVERT OF THE PIT WITHIN A MINIMUM 200mm LAYER OF FREE DRAINING MATERIAL. AG PIPE TO BE CONNECTED TO A DRAINAGE OUTLET (REFER TO TYPICAL TREE PIT DRAINAGE SECTION)
- WATER / IRRIGATION CONTROLLER POINTS SHOWN INDICATIVELY ONLY. EXACT LOCATION TO BE CONFIRMED ONSITE
- ALL POTS TO HAVE AN IRRIGATION ALLOWANCE (SHRUBBLERS OR DRIP)
- FOR POTS LOCATED ON PAVED SURFACES, TYPICAL PAVING IRRIGATION DETAIL TO BE USED AS SHOWN
- POTS ADJACENT TO GARDEN BEDS TO BE IRRIGATED VIA IN GARDEN IRRIGATION SYSTEM
- ALL GARDEN BEDS TO HAVE FIXED SOLID RISERS WITH SPRAYS



CITY OF PORT PHILLIP
PORT PHILLIP PLANNING SCHEME

This endorsed plan complies with Condition No. 12 in Planning Permit No: PDPL/00817/2022
Date: 12/12/2024 Sheet: 2 of 8

FINISHES SCHEDULE

P1 - OUTDOOR TERRACE PAVING
PRODUCT: PORCELAIN TILES
COLOUR: WARM TONE
FINISH: BUSH-HAMMERED




PLANT SCHEDULE


TREES									
CODE	BOTANIC NAME	COMMON NAME	ZONE 1	ZONE 2	ZONE 3	ZONE 4	TOTAL	POT SIZE	MATURE HEIGHT
AP	Acer palmatum	Japanese Maple	3	2	4	2	11	Mature	2 - 2.5m
BN	Betula nigra	Tropical Birch	1				1	400L	12m
SHRUBS									
CODE	BOTANIC NAME	COMMON NAME	ZONE 1	ZONE 2	ZONE 3	ZONE 4	TOTAL	POT SIZE	MATURE HEIGHT
Bg	Blechnum gibbum	Silver Lady Fern	21				21	200mm	1m
No	Nerium oleander dwarf	Rose Bay		5	7		12	200mm	1m
Rio	Raphiolepis indica 'Oriental Pearl'	Oriental Pearl Indian Hawthorn		8	15		23	300mm	1m
Ro	Rosmarinus officinalis	Rosemary		11	10		21	200mm	1.2m
PERENNIALS									
CODE	BOTANIC NAME	COMMON NAME	ZONE 1	ZONE 2	ZONE 3	ZONE 4	TOTAL	POT SIZE	MATURE HEIGHT
Lr	Ligularia reniformis	Tractor Seat Plant	12	12	16		40	200mm	1m
Ps	Polystichum setiferum	Soft Shield Fern	5	3	3		11	175mm	0.3m
GROUNDCOVERS & CLIMBERS									
CODE	BOTANIC NAME	COMMON NAME	ZONE 1	ZONE 2	ZONE 3	ZONE 4	TOTAL	POT SIZE	MATURE HEIGHT
Lg	Leucobryum glaucum	Pin Cushion Moss	3				3	Tray	Moss Groundcover
Rpr	Rosmarinus officinalis 'prostratus'	Creeping Rosemary			21		21	100mm	Groundcover
Ta	Trachelospermum asiaticum	Asiatic Jasmine	12	18	9		39	100mm	Groundcover
Ts	Thymus serpyllum	Creeping Thyme		9	12		21	100mm	Groundcover
SUCCULENTS									
CODE	BOTANIC NAME	COMMON NAME	ZONE 1	ZONE 2	ZONE 3	ZONE 4	TOTAL	POT SIZE	MATURE HEIGHT
Aa	Agave americana	Century Plant		1	3	4	8	400mm	1m
Ca	Crassula arborescens	Silver Dollar Plant			2	4	6	300mm	0.5-1m
Sr	Senecio radicans	Curio Radicans			12	16	28	140mm	0.2m

NOTES


- IF SPECIFIED POT SIZES ARE NOT READILY AVAILABLE, PLEASE CONTACT MBD TO CLARIFY SUBSTITUTE SIZES AND CHANGES TO QUANTITIES
- ALL MATURE TREES TO BE SOURCED AND SUPPLIED BY MYLES BALDWIN DESIGN
- THE PLANT SCHEDULE IS CALCULATED BASED OFF THE LANDSCAPE PLANS PROVIDED BY MBD. ADDITIONAL PLANTS OUTSIDE OF THIS SCHEDULE MAY BE REQUIRED TO REACH THE DESIRED PLANT DENSITIES ONSITE
- ALL PLANT MATERIAL TO BE SETOUT ONSITE BY MYLES BALDWIN DESIGN PRIOR TO INSTALLATION

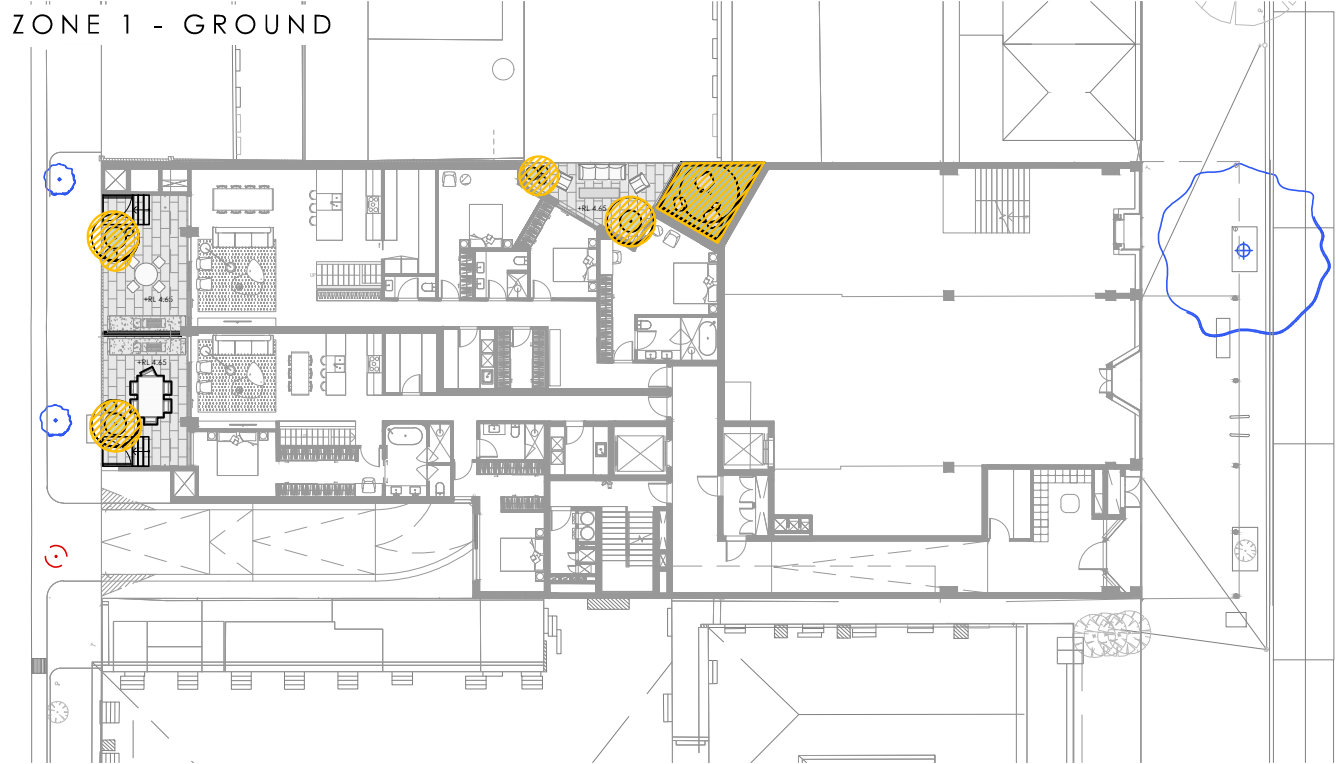


ZONE 2 - LEVEL 01

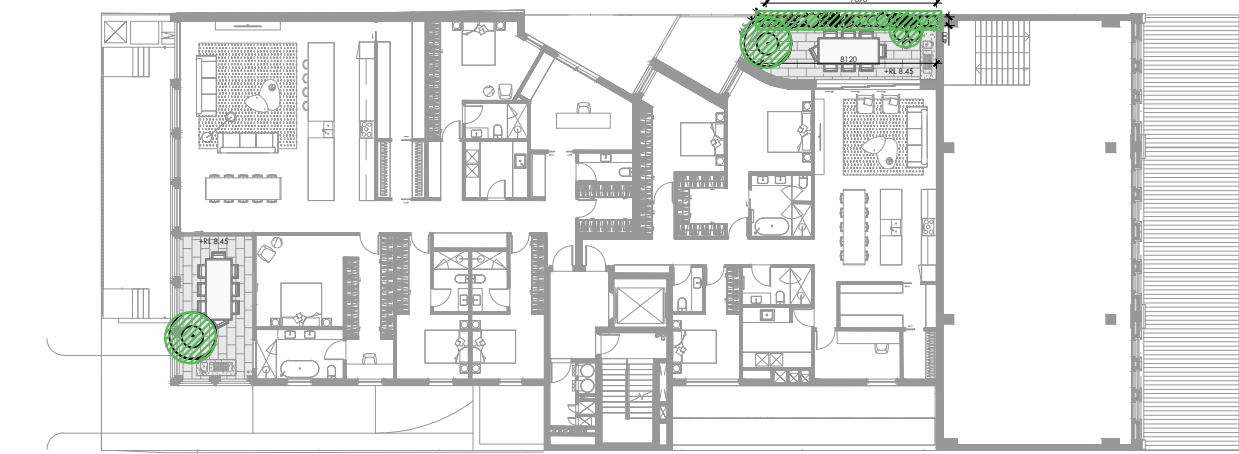

ZONE 3 - LEVEL 02

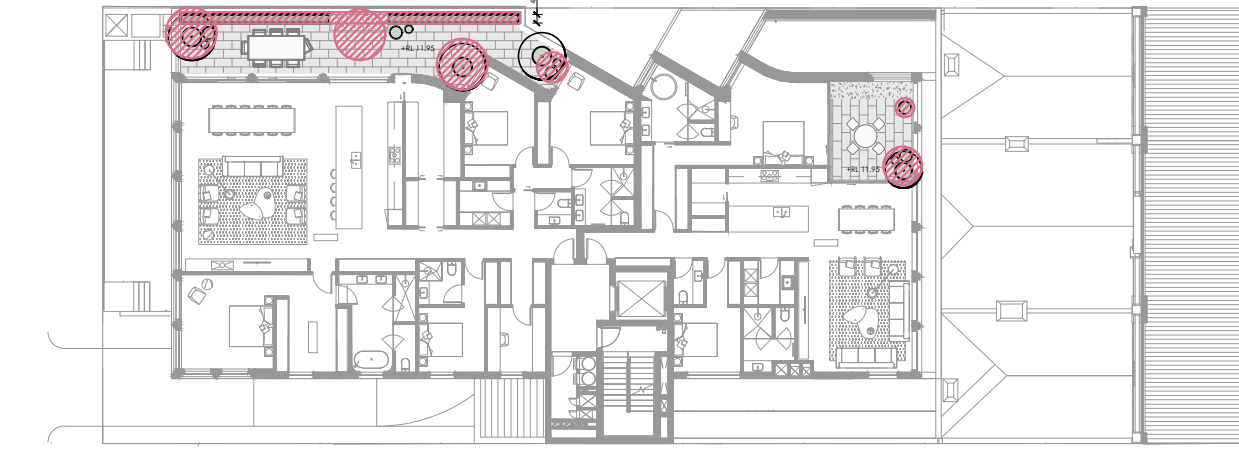

ZONE 4 - LEVEL 03

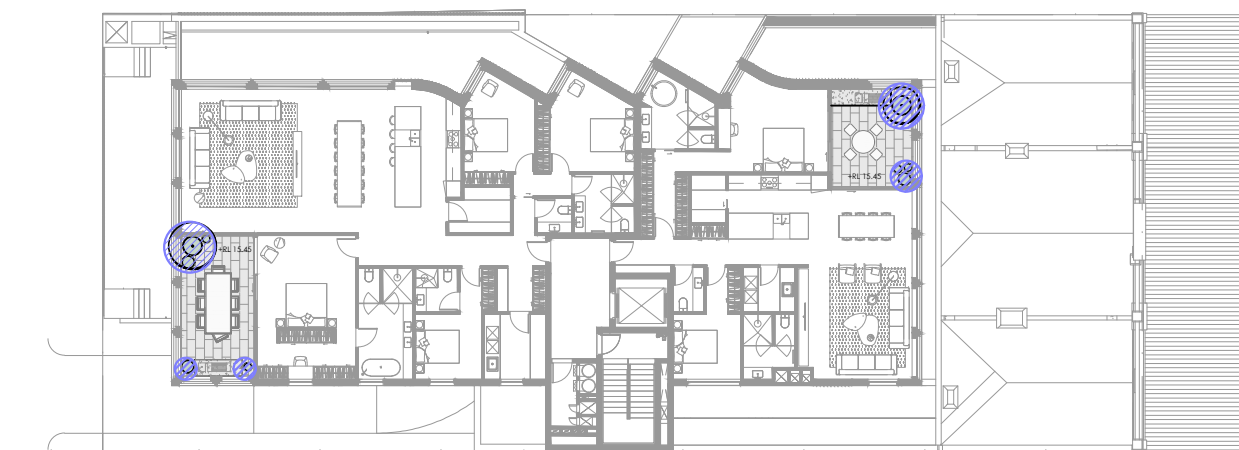

PLANTING KEY PLAN
SCALE 1:350 @ A1

LEGEND


- ZONE 1 - GROUND
- ZONE 2 - LEVEL 01
- ZONE 3 - LEVEL 02
- ZONE 4 - LEVEL 03

PROJECT:
146 - 150 BRIDPORT STREET, ALBERT PARK
CLIENT:
JACMAX



AMENDMENT		
SIZE	DATE	DETAILS
A	14.09.23	FOR TOWN PLANNING
B	22.08.24	FOR ENDORSEMENT

MBD MUST BE PRESENT ON-SITE FOR THE POSITIONING OF **ALL PLANTS**.
CONTACT MBD IF DISCREPANCIES OCCUR BETWEEN LANDSCAPE AND CONSULTANTS DOCUMENTS.
BUILDER TO CHECK AND VERIFY ALL DIMENSIONS ON SITE PRIOR TO CONSTRUCTION.

DRAWING:
PLANT SCHEDULE




DWG No: 691_TP_02
SCALE: AS NOTED
DRAWN: LPM
CHECKED: GC
ISSUE: B
THIS DRAWING IS COPYRIGHT

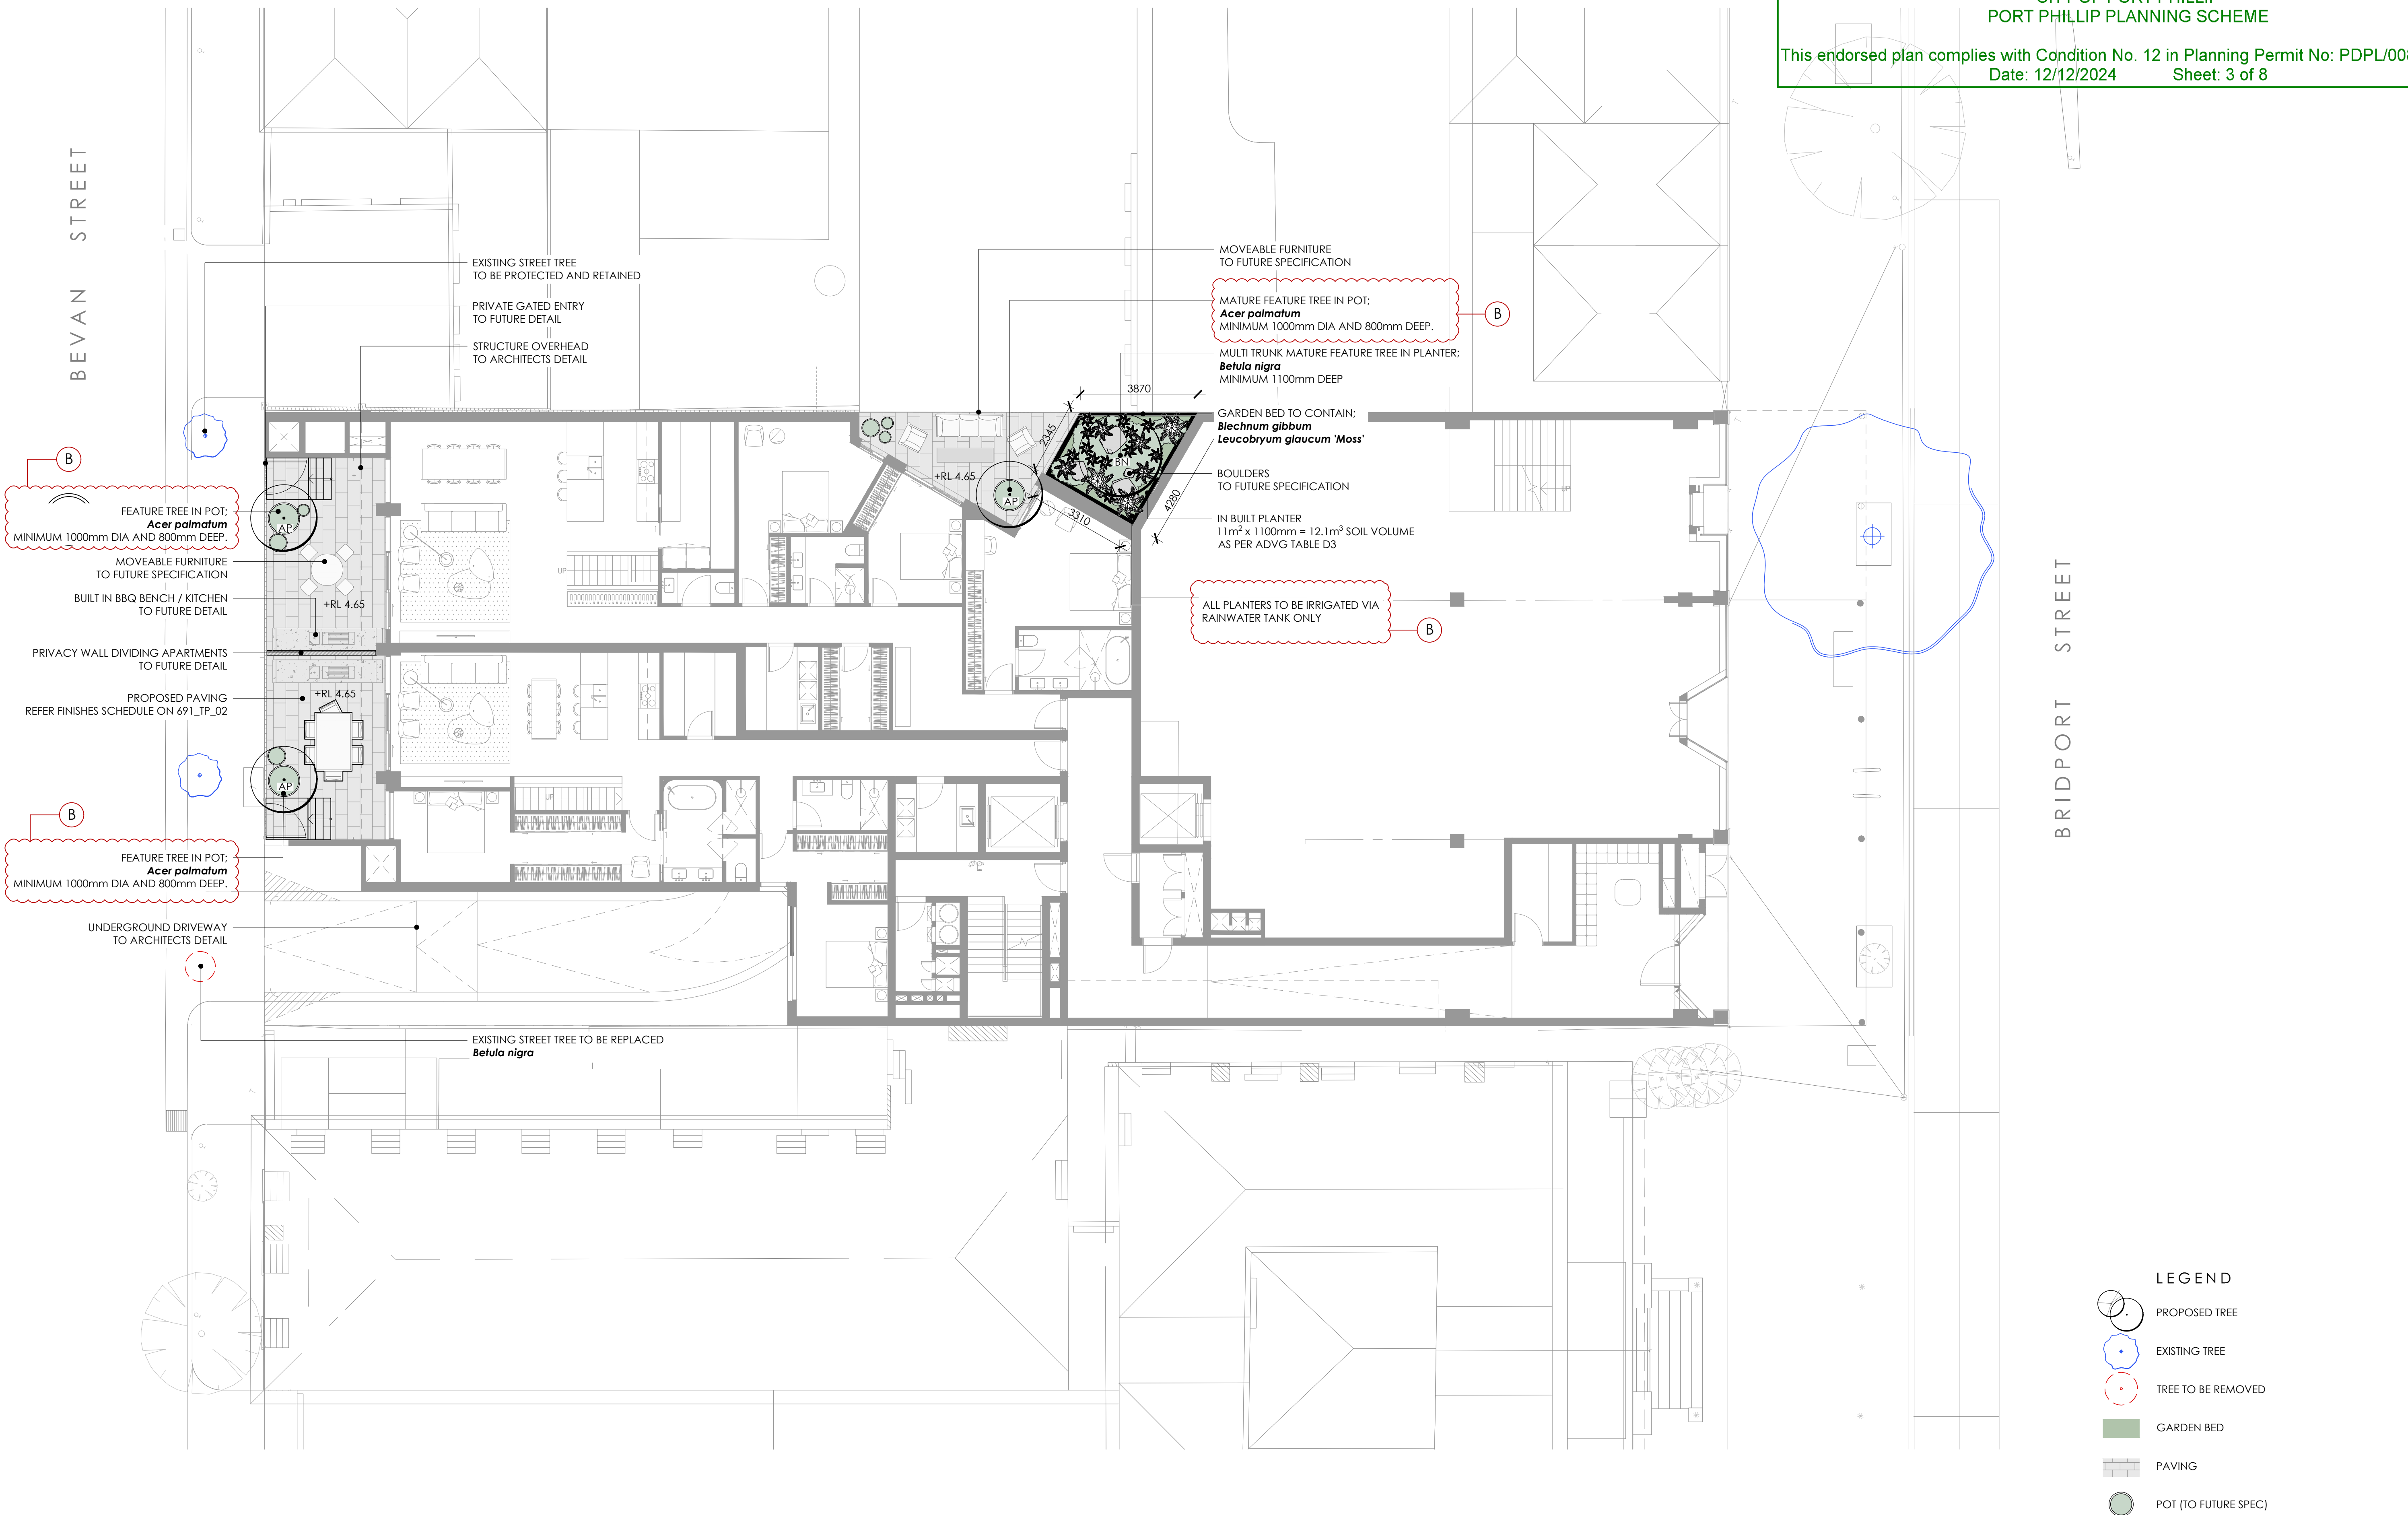
CITY OF PORT PHILLIP
PORT PHILLIP PLANNING SCHEMEThis endorsed plan complies with Condition No. 12 in Planning Permit No: PDPL/00817/2022
Date: 12/12/2024 Sheet: 3 of 8MYLES BALDWIN DESIGN
8 Maddison Lane, Readeam, NSW 2016 Australia
PH +61 2 9699 2622 | www.mylesbaldwin.comPROJECT:
146 - 150 BRIDPORT STREET, ALBERT PARKCLIENT:
JACMAX

AMENDMENT	DATE	DETAILS
A	14.09.23	FOR TOWN PLANNING
B	23.08.24	FOR ENDORSEMENT


M&B MUST BE PRESENT ON-SITE FOR THE POSITIONING OF **ALL PLANTS**.
CONTACT M&B IF DISCREPANCIES OCCUR BETWEEN LANDSCAPE AND CONSULTANTS DOCUMENTS.
BUILDER TO CHECK AND VERIFY ALL DIMENSIONS ON SITE PRIOR TO CONSTRUCTION.


DRAWING:

LANDSCAPE PLAN
GROUND FLOORDWG No: 691_TP_10
SCALE: 1:100 @ A1
DRAWN: LPMCHECKED: GC
ISSUE: B
THIS DRAWING IS COPYRIGHT

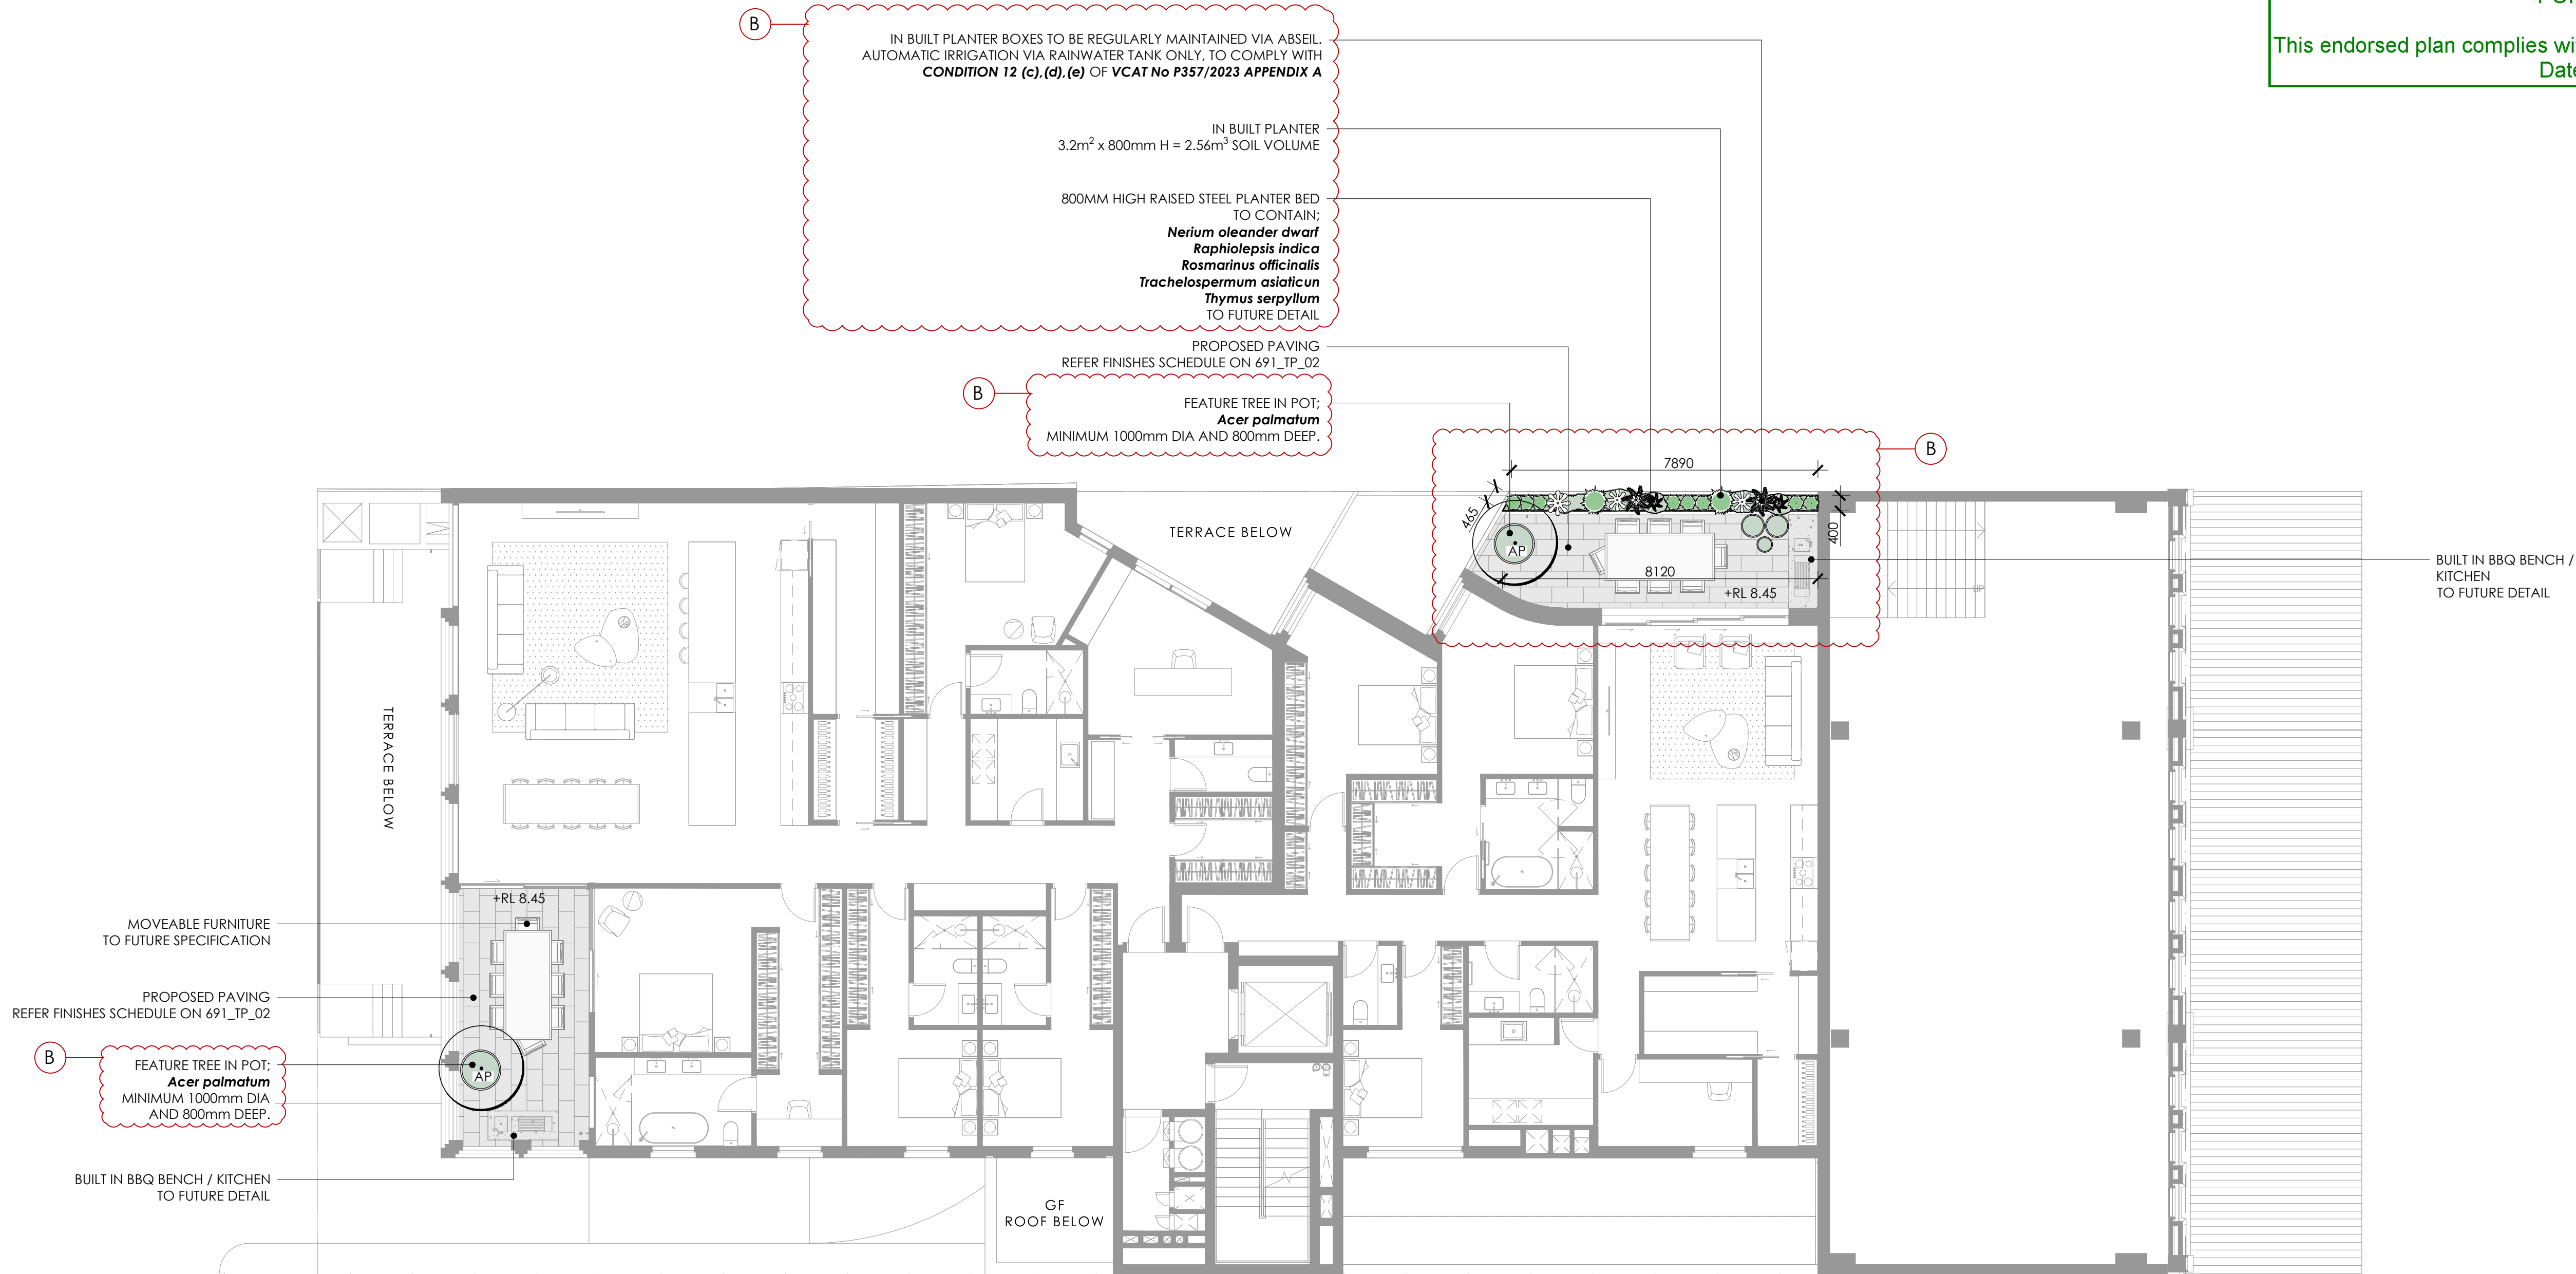CITY OF PORT PHILLIP
PORT PHILLIP PLANNING SCHEMEThis endorsed plan complies with Condition No. 12 in Planning Permit No: PDPL/00817/2022
Date: 12/12/2024 Sheet: 4 of 8

LEGEND



SCALE 1:100
0 1 2 3 4 5 6

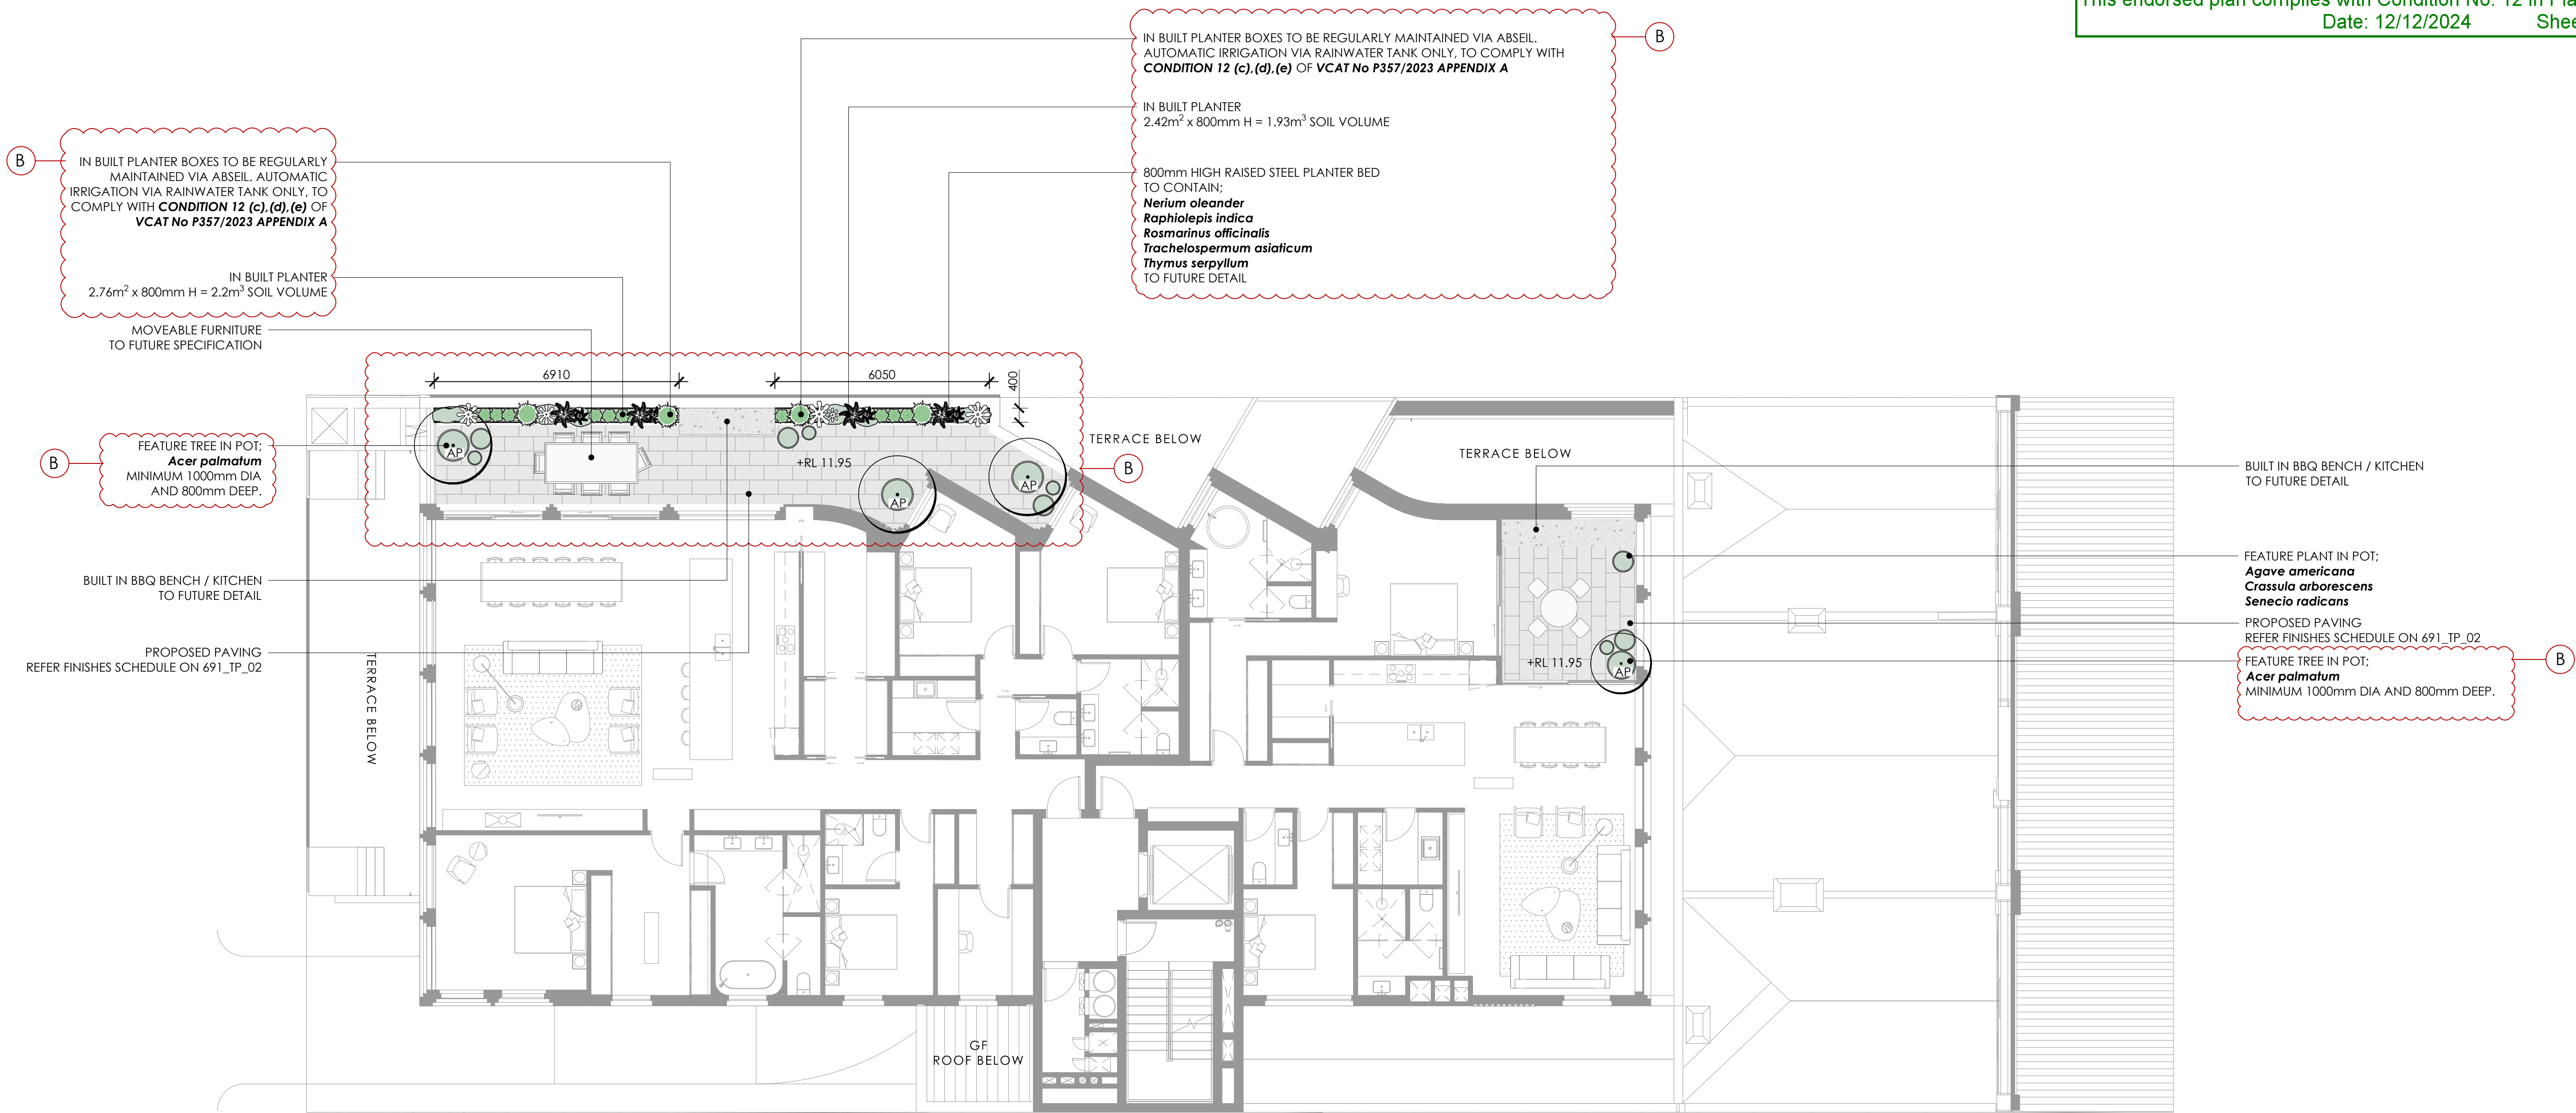CITY OF PORT PHILLIP
PORT PHILLIP PLANNING SCHEMEThis endorsed plan complies with Condition No. 12 in Planning Permit No: PDPL/00817/2022
Date: 12/12/2024 Sheet: 5 of 8

LEGEND


- PROPOSED TREE
- GARDEN BED
- PAVING
- POT

SCALE 1:100

MYLES BALDWIN DESIGN
8 Maddison Lane, Redfern, NSW 2016 Australia
PH +61 2 9699 2622 | www.mylesbaldwin.comPROJECT:
146 - 150 BRIDPORT STREET, ALBERT PARK
CLIENT:
JACMAXAMENDMENT
DATE
A 14.09.23 FOR TOWN PLANNING
B 23.08.24 FOR ENDORSEMENTMBD MUST BE PRESENT ON-SITE FOR THE POSITIONING OF **ALL PLANTS**.
CONTACT MBD IF DISCREPANCIES OCCUR BETWEEN LANDSCAPE AND CONSULTANTS DOCUMENTS.
BUILDER TO CHECK AND VERIFY ALL DIMENSIONS ON SITE PRIOR TO CONSTRUCTION.DRAWING:
**LANDSCAPE PLAN
LEVEL 02**DWG No: 691_TP_12
SCALE: 1:100 @ A1
DRAWN: LPM
CHECKED: GC
ISSUE: B
THIS DRAWING IS COPYRIGHT


CITY OF PORT PHILLIP
PORT PHILLIP PLANNING SCHEME

This endorsed plan complies with Condition No. 12 in Planning Permit No: PDPL/00817/2022
Date: 12/12/2024 Sheet: 6 of 8

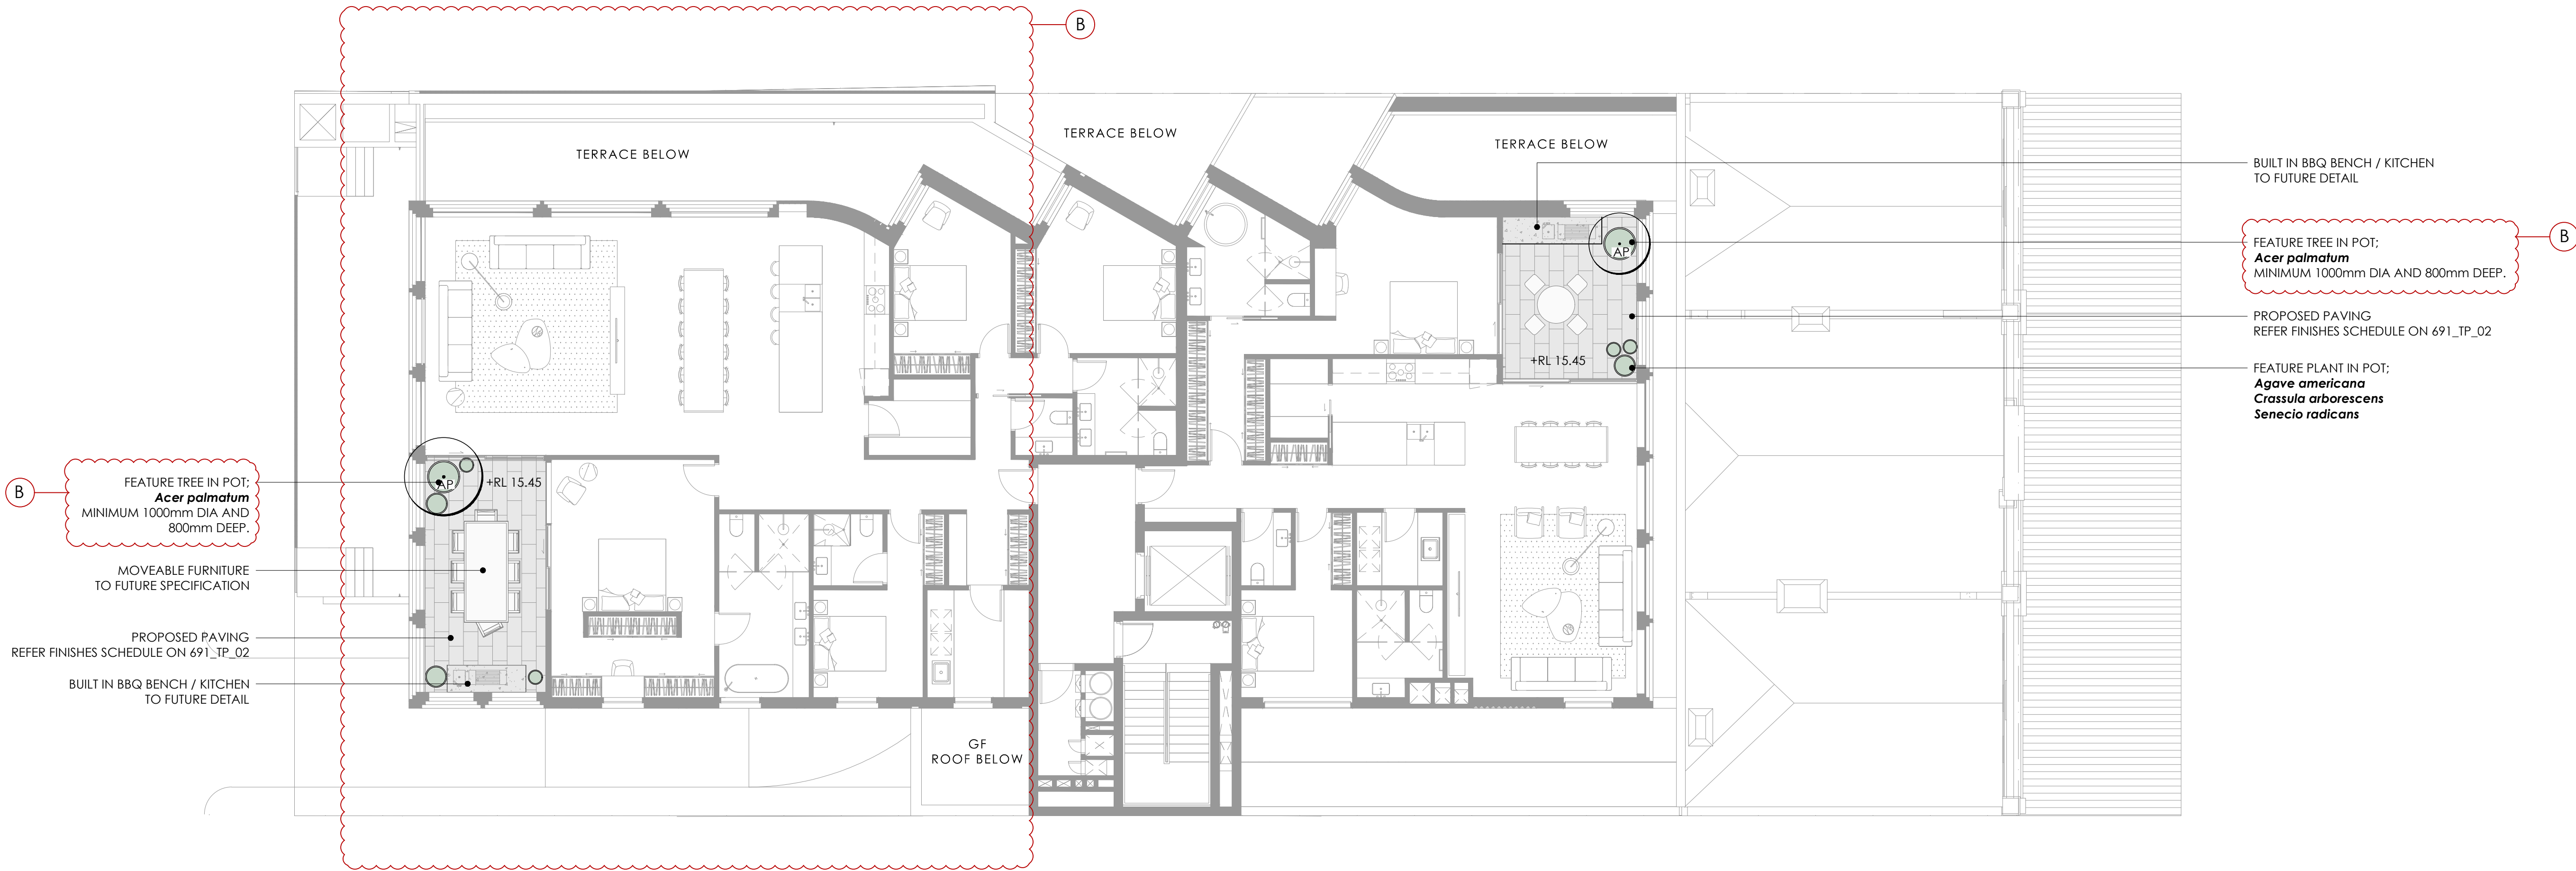


- LEGEND
- PROPOSED TREE
 - GARDEN BED
 - PAVING
 - POT

SCALE 1:100




CITY OF PORT PHILLIP
PORT PHILLIP PLANNING SCHEME


This endorsed plan complies with Condition No. 12 in Planning Permit No: PDPL/00817/2022
Date: 12/12/2024 Sheet: 7 of 8

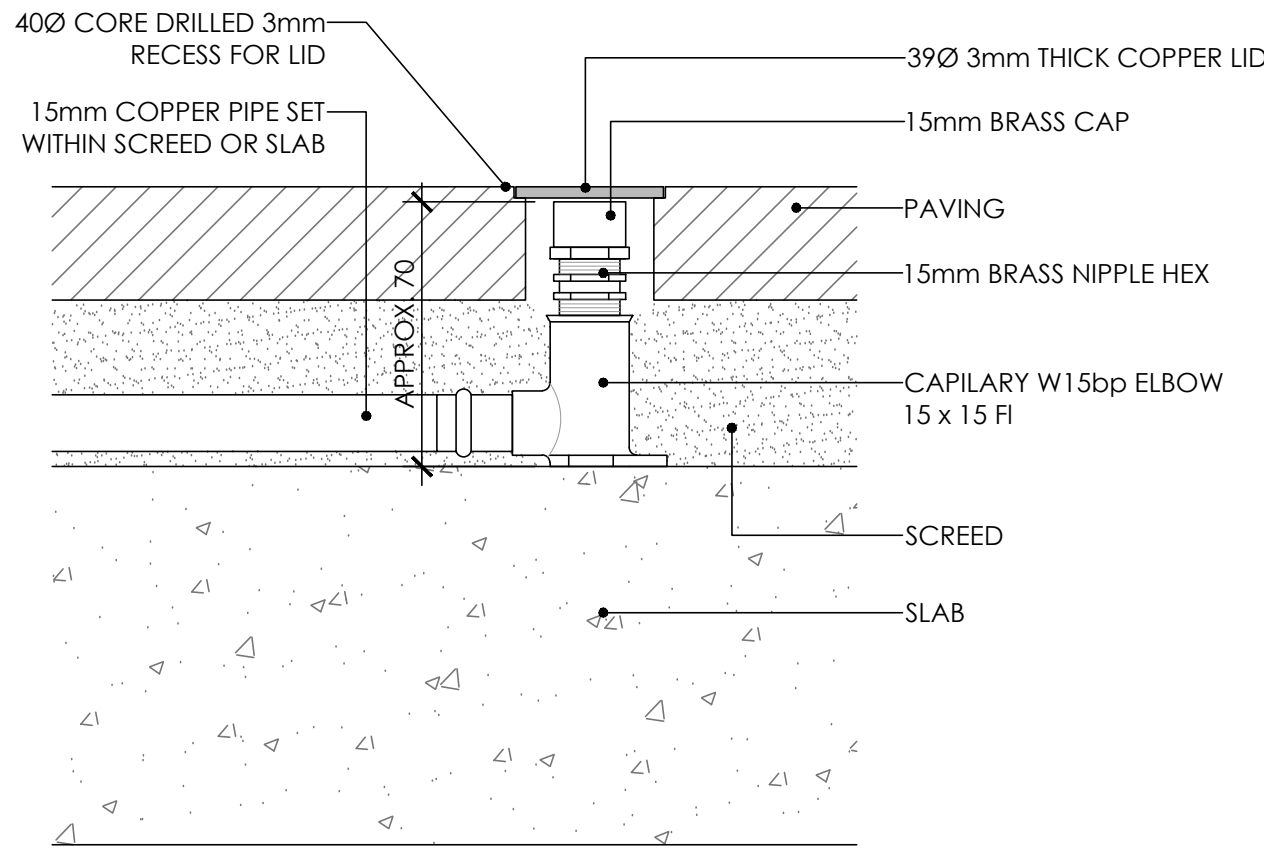


TYPICAL PAVING IRRIGATION CLOSED
SCALE 1:2 @ A1

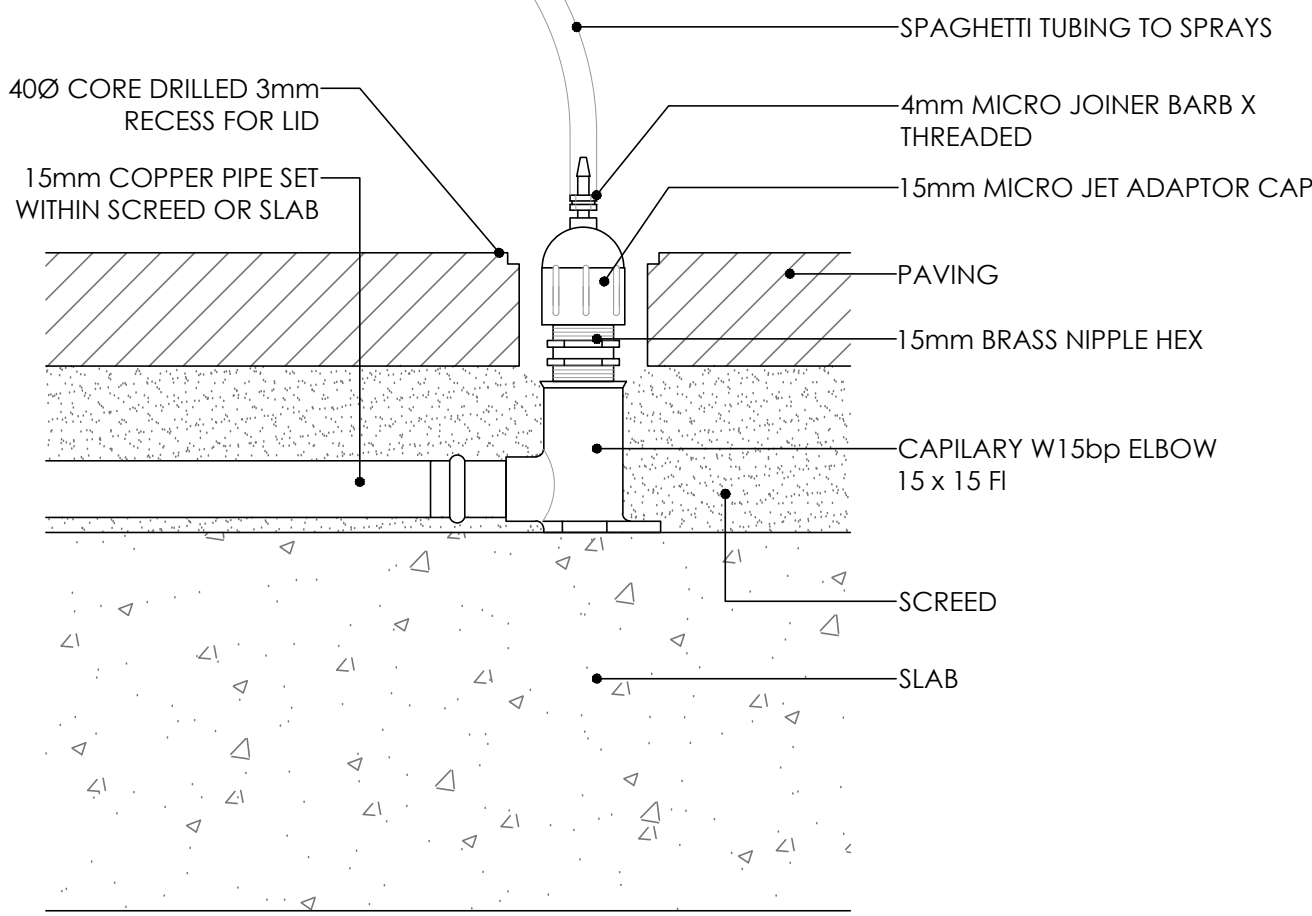

TYPICAL PAVING IRRIGATION OPEN
SCALE 1:2 @ A1

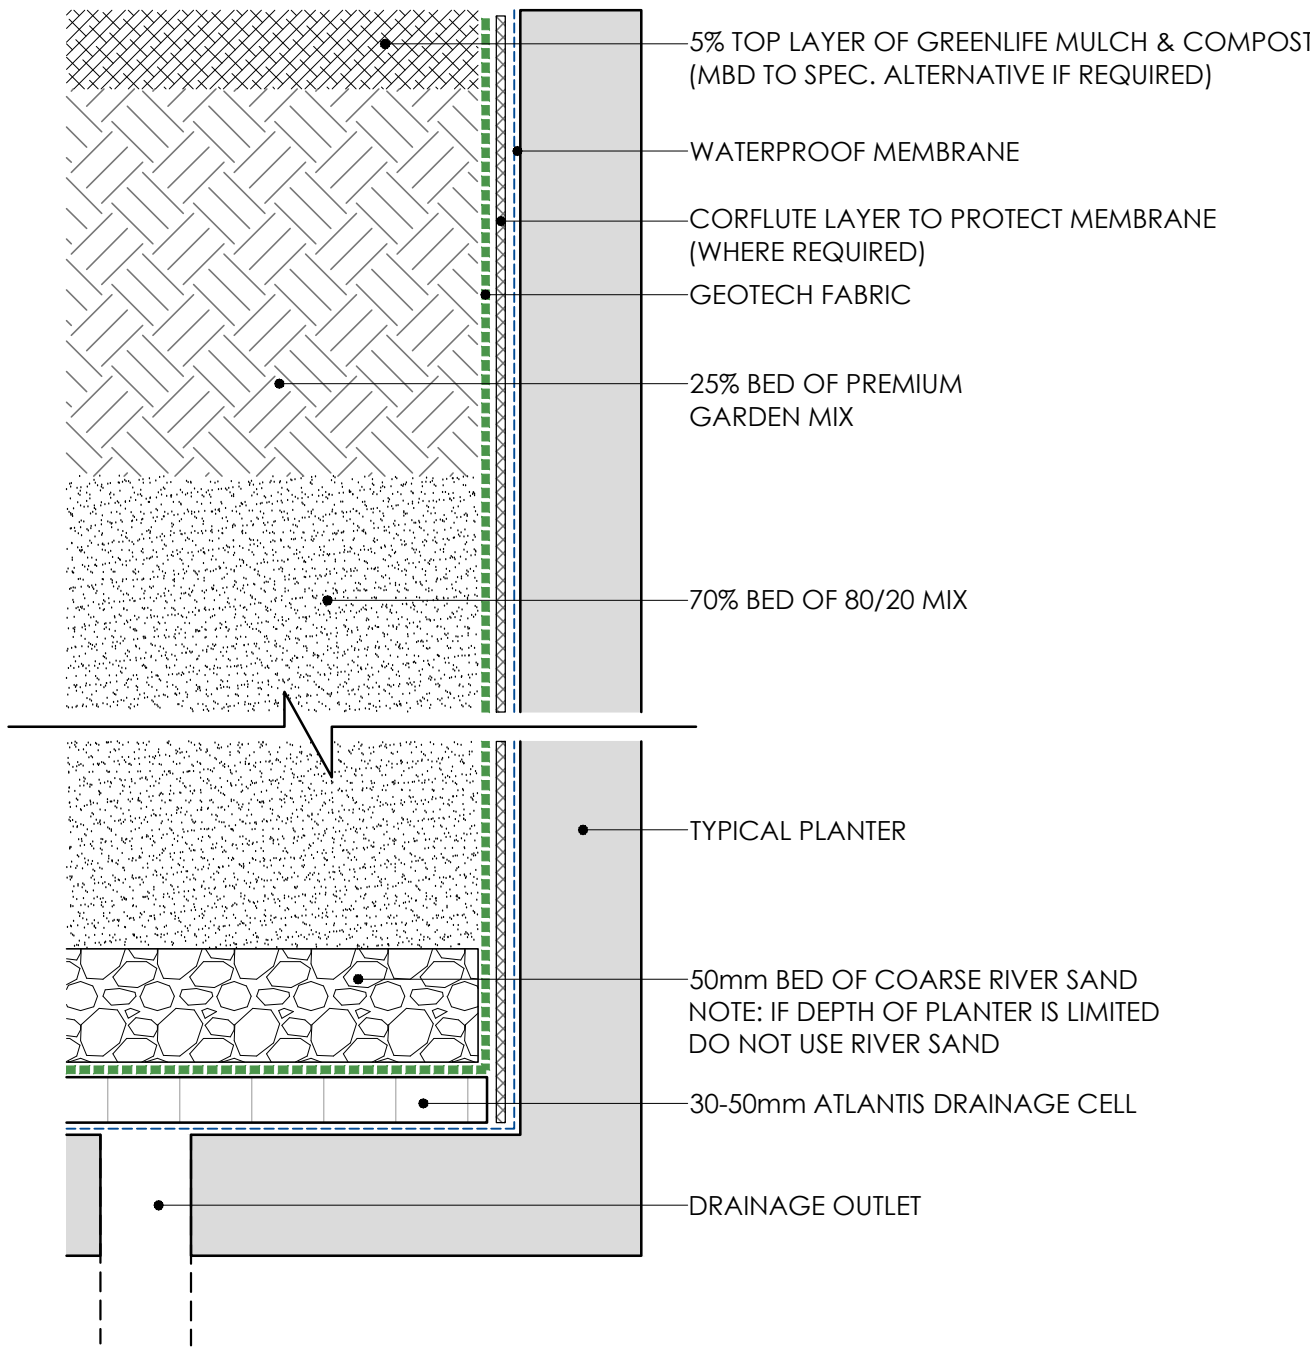

TYPICAL PLANTER SOIL PROFILE
SCALE: 1:5 @ A1

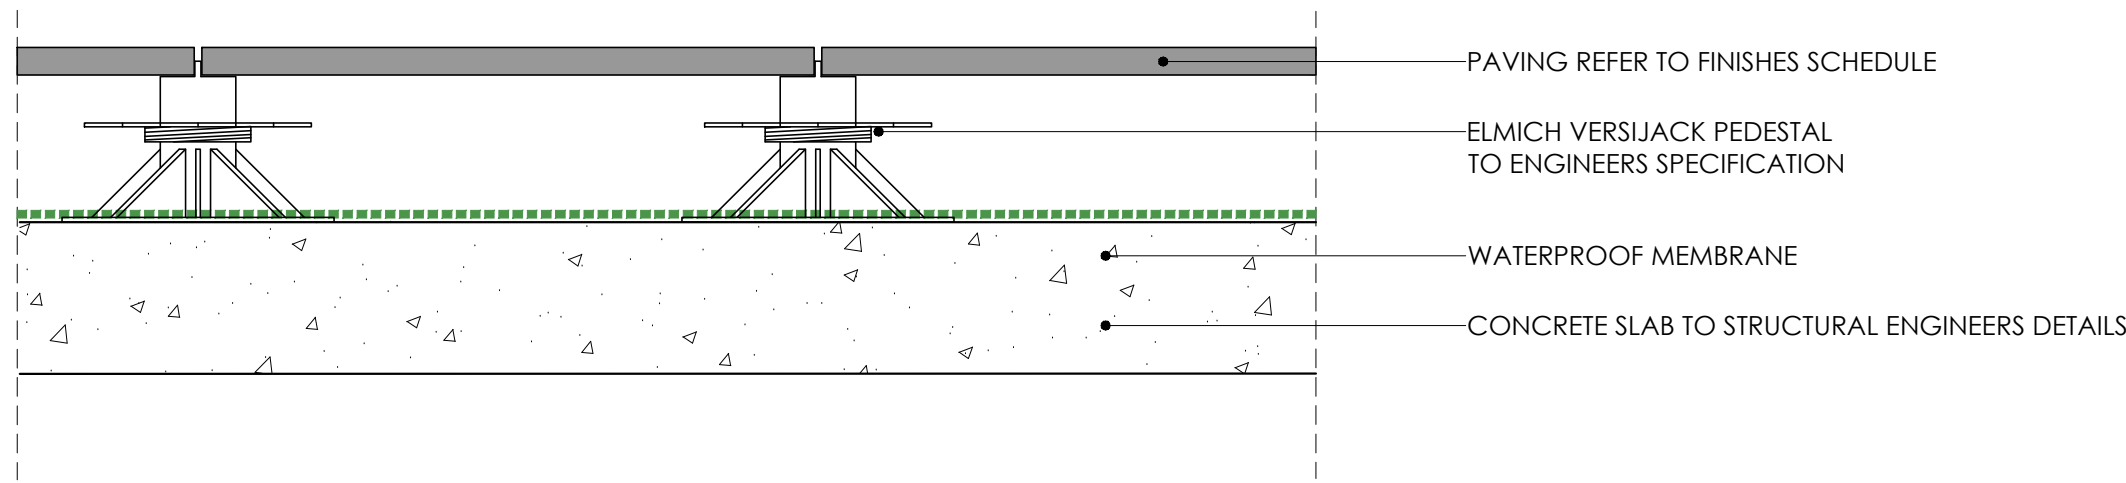

TYPICAL PAVING ON PEDESTAL STRUCTURE
SCALE 1:5 @ A1

CITY OF PORT PHILLIP

PORT PHILLIP PLANNING SCHEME

This endorsed plan complies with Condition No. 12 in Planning Permit No: PDPL/00817/2022

Date: 12/12/2024Sheet: 8 of 8

GENERAL SPECIFICATION NOTES

1.0STANDARDS

1.1SOILS

- AS 4419: Soils for Landscaping and Garden Use
- AS 3743: Potting Mixes
- AS 4454: Composts, Soil Conditioners and Mulches

1.2Plants

- AS 2303: Tree Stock for Landscape Use
- AS 4970: Protection of Trees on Development Sites

2.0PRODUCTS

2.1MATERIAL

Topsoil

- Source: Provide topsoil, which contains organic matter, is free from stones, contaminants and weeds
- Site: If available, provide material recovered from the site

Turf

- Supplier: Obtain turf from a specialist grower of cultivated turf
- Quality: Provide turf of even thickness, free from weeds and other foreign matter

Fertiliser

- General: Provide proprietary fertilisers, delivered to the site in sealed bags marked to show manufacturer or vendor, weight, fertiliser type, N:P:K ratio, recommended uses and application rates

Plants

- Health: Supply plants with foliage size, texture and colour at time of delivery consistent with the size, texture and colour shown in healthy specimens of the nominated species
- Vigour: Supply plants with extension growth consistent with that exhibited in vigorous specimens of the species nominated
- Damage: Supply plants free from damage and from restricted habit due to growth in nursery rows
- Pests and disease: Supply plants with foliage free from pest attack or disease
- Substitutes: Plant substitution (species or quantities) is not acceptable unless approved by Myles Baldwin Design.

3.0EXECUTION

3.1SITE PREPARATION

Weed eradication

- Herbicide: Eradicate weeds with a non-residual glyphosate herbicide in any of its registered formulae, at the recommended maximum rate
- Earth mounds
- Placing: Place clean filling in layers approximately 150 mm thick compacted to 85% of the dry density ratio of the surrounding soil as determined by AS 1289.5.4.1. Minimise slumping and further internal packing down

Edges

- Construct changes in grade over a minimum width of 500 mm to smooth, gradual and rounded profiles with no distinct joint

Existing trees

- Tree protection zones (TPZ) shall be established around all trees to be retained and in accordance of AS 4970. The area within the fence shall be mulched and maintained at 75mm depth
- No excavation, construction activity, grade changes, storage of materials, stock piling, siting of sheds, preparation of mixes or cleaning of talls is permitted within the TPZ

Planting beds

- Excavated: Excavate to bring the subsoil to at least 300 mm below finished design levels. Shape the subsoil to fall to subsoil drains where applicable. Break up the subs to a further depth of 100 mm
- Unexcavated: Remove weeds, roots, building rubble and other debris. Bring the planting bed to 75 mm below finished design levels
- Services and roots: Do not disturb services or tree roots; if necessary, cultivate these areas by hand

Placing topsoil

- General: Spread the topsoil on the prepared subsoil and grade evenly, making the necessary allowances to permit the following:
- Required finished levels and contours may be achieved after light compaction
- Grassed areas may be finished flush with adjacent hard surfaces such as kerbs, paths and mowing strips

Topsoil depths

- General: Spread topsoil to the following typical depths:
- Excavated planting areas: If using organic soil, 300 mm. Refer to typical soil profile detail
- Irrigated grassed areas generally: 150 mm
- Irrigated grassed areas, heavy use (e.g. playing fields, playgrounds, and public parks): 200 mm

Sediment and Erosion Control

- Sediment and erosion control measures are required during the construction of all developments and building works. It shall be the contractor's responsibility that works are carried out in accordance with a sediment and erosion control plan and council/approving authority's requirements.

3.2TURFING

General

- Supply: Deliver the turf within 24 hours of cutting, and lay it within 36 hours of cutting. Prevent the turf from drying out between cutting and laying. If it is not laid within 36 hours of cutting, roll it out on a flat surface with the grass up, and water as necessary to maintain a good condition
- Laying: Lay the turf in the following manner:
- In stretcher pattern with the joints staggered and close butted
- Parallel with the long sides of level areas, and with contours on slopes
- To finish flush, after tamping, with adjacent finished surfaces of ground, paving edging, or grass seeded areas
- Tamping: Lightly tamp to an even surface immediately after laying. Do not use a roller
- Fertilising: Mix the fertiliser thoroughly into the topsoil before placing the turf. Apply lawn fertiliser at the completion of the first and last mowings, and at other times as required to maintain healthy grass cover
- Watering: Water immediately after laying until the topsoil is moistened to its full depth. Continue watering to maintain moisture to this depth
- Levels: Where levels have deviated from the design levels after placing and watering, lift turf and re-grade topsoil to achieve design levels

3.3PLANTING

General

- Individual plantings in grassed areas: Excavate a hole twice the diameter of the root ball and at least 100 mm deeper than the root ball. Break up the base of the hole to a further depth of 100 mm, and loosen compacted sides of the hole to prevent confinement of root growth
- Watering: Thoroughly water the plants before planting, immediately after planting, and as required to maintain growth rates free of stress
- Placing: Remove the plant from the container with minimum disturbance to the root ball, ensure that the root ball is moist and place it in its final position, in the center of the hole and plumb, and with the top soil level of the plant root ball level with the finished surface of the surrounding soil
- Fertilising plants: In planting beds and individual plantings, place fertiliser pellets around the plants at the time of planting
- Backfilling: Backfill with topsoil mixture. Lightly tamp and water to eliminate air pockets

3.4TREES

General

- All trees must be planted by an AQF Level 3 Qualified Arborist, Landscape Gardener or Horticulturalist

Clay Soils

- The base of each tree pit within clay soils shall be laid with 100mm deep scoria. A 90mm ag line ring shall sit within the scoria and drain directly to a suitable location. Lay geo-textile fabric evenly above the scoria, prior to tree placement and backfilling with 80/20 mineral soil

3.5MULCHING

Placing mulch

- General: Place mulch to the required depth, clear of plant stems, and rake to an even surface flush with the surrounding finished levels. Spread and roll mulch so that after settling, or after rolling, it is smooth and evenly graded between design surface levels sloped towards the base of plant stems in plantation beds, and not closer to the stem than 50 mm in the case of gravel mulches.
- Garden beds: Greenlife Mulch and Compost
- Tree mulch ring: Mushroom compost
- Depths: Spread organic mulch to a depth of 75 mm, and gravel mulch to a depth of 50 mm

3.6STAKES AND TIES

Stakes

- Material: Hardwood, straight, free from knots or twists, pointed at one end
- Installation: Drive stakes into the ground at least one third of their length, avoiding damage to the root system

Ties

- General: Provide 50 mm hessian webbing ties fixed securely to the stakes, one tie at half the height of the main stem, others as necessary to stabilise the plant

3.7WATERING

Establishment

- Extent: Available soil moisture content of grass areas and garden beds to be monitored on a weekly basis using an approved moisture probe and water applied on a demand basis. Readings should be taken at a depth of 250mm
- All grass areas and garden beds should be maintained within a range of 50-80% available soil moisture. Under no circumstance should areas under irrigation fall below a level of 30% available soil moisture
- No visible signs of wilting of leaves or stems, with all plants fully turgid at all times.
- No sign of over-watering such as constantly wet soil, brown leaf margins, stem rot or brown spots on foliage

3.8LANDSCAPE SUBSOIL DRAINAGE

General

- Include subsoil drainage behind retaining walls, along path edges and in mass planting beds, including lawn areas. Maintenance access points shall be every 15m

Materials

- Geotextile fabric: shall consist of a woven or a non-woven type to be manufactured from synthetic materials other than polyamide
- Aggregate: shall be a single size with a nominal dimension of 10-40mm
- Subsoil pipe: shall be 90 mm diameter corrugated flexible slotted PVC pipe in a geofabric sock, or 100mm µPVC if under pavement. All pipes to requirements of AS 1254. Where vehicle loads are encountered, reinforced concrete pipe shall be used only

Construction

- Trenches to be minimum 300mm wide and extend 500mm below the subgrade level or 150mm if into bed rock
- Trenches to be lined with geotextile fabric and backfilled with aggregate. Pipe to be laid 50mm above trench floor
- Prior to backfilling the trench, drainage and connection to stormwater is to be approved by the site manager

3.9COMPLETION

Cleaning

- Stakes and ties: Remove those no longer required at the end of the planting establishment period
- Temporary fences: Remove temporary protective fences at the end of the planting establishment period

4.0ESTABLISHMENT & DEFECTS LIABILITY

4.1ESTABLISHMENT

General

- All landscaping works will have an establishment period of 26 weeks in which the subcontractor will be responsible for the maintenance and upkeep of the contracted scope, unless otherwise noted in the project documentation. If applicable refer to the project manager / builder for confirmation

4.2DEFECTS LIABILITY PERIOD

General

- All landscaping works will be subject to a defects liability period of 52 weeks, commencing from the date of Practical Completion, unless otherwise noted in the project documentation. If applicable refer to the project manager / builder for confirmation

4.3FAILED PLANTINGS

General

- Photographic images of plants shall be approved by Myles Baldwin Design prior to procurement of replacement plant and tree stock